

WAAS CH 86938 W18A	APP CRS 176°	Rwy Ldg TDZE 1298 Apt Elev 1304	5513
--	------------------------	---	-------------

RNAV (GPS) RWY 18



MITCHELL MUNI (MHE)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Huron Rgnl altimeter setting and increase LPV DA to 1637, LNAV/VNAV DA to 1685 and increase all MDA 100 feet. Increase LPV visibility all Cats to 1½ mile, LNAV/VNAV visibility all Cats to 1¾ mile and LNAV Cats C/D to 1¾ mile. Increase Circling Cat C visibility to 1¾ mile. Baro VNAV and VDP NA when using Huron Rgnl altimeter setting.

MISSED APPROACH: Climb to 3500 direct AVAME and hold.

ASOS 124.175	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

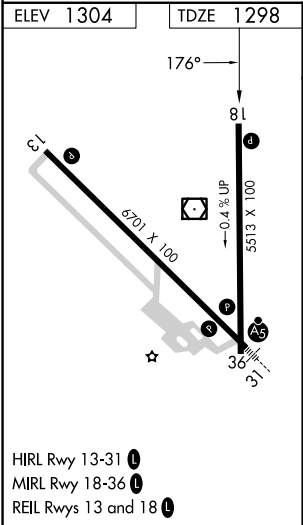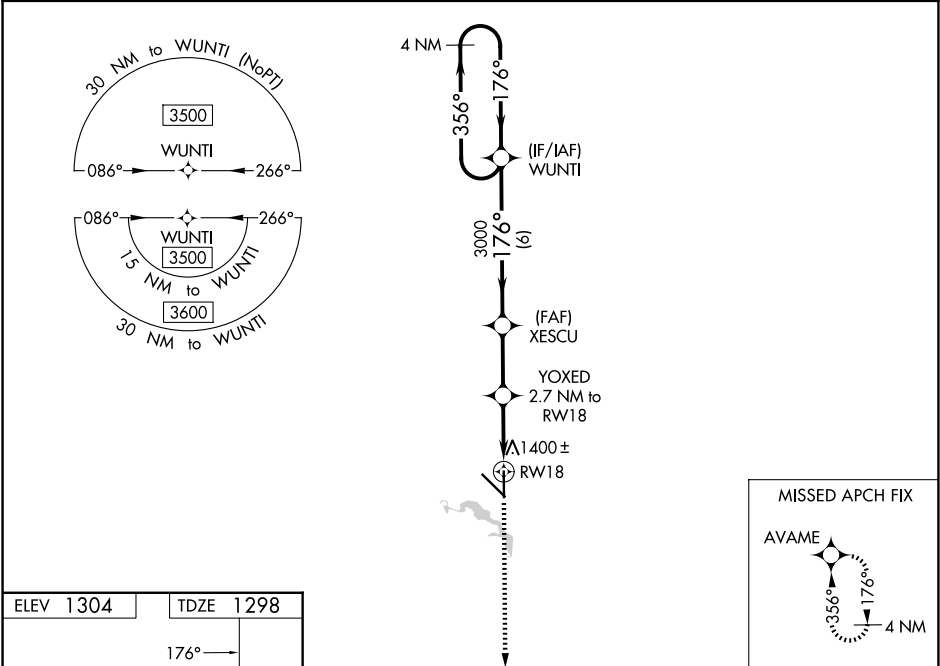

WUNTI				
4 NM Holding Pattern				
3500 ← 356° → 176° → 176° → 3000				
GP 3.00° TCH 55				
XESCU 3000				
YOXED 2.7 NM to RW18				
*2200				
*1 NM to RW18				
RW18				
6 NM 2.5 NM 1.7 NM 1 NM				
CATEGORY	A	B	C	D
LPV DA	1548-1 250 (300-1)			
LNAV/VNAV DA	1596-1 298 (300-1)			
LNAV MDA	1660-1 362 (400-1)			
CIRCLING	1740-1 436 (500-1)	1760-1 456 (500-1)	1820-1½ 516 (600-1½)	1860-2 556 (600-2)