

WAAS CH 70700 W31A	APP CRS 310°	Rwy Ldg TDZE 1304 Apt Elev 1304
--	------------------------	---

RNAV (GPS) RWY 31

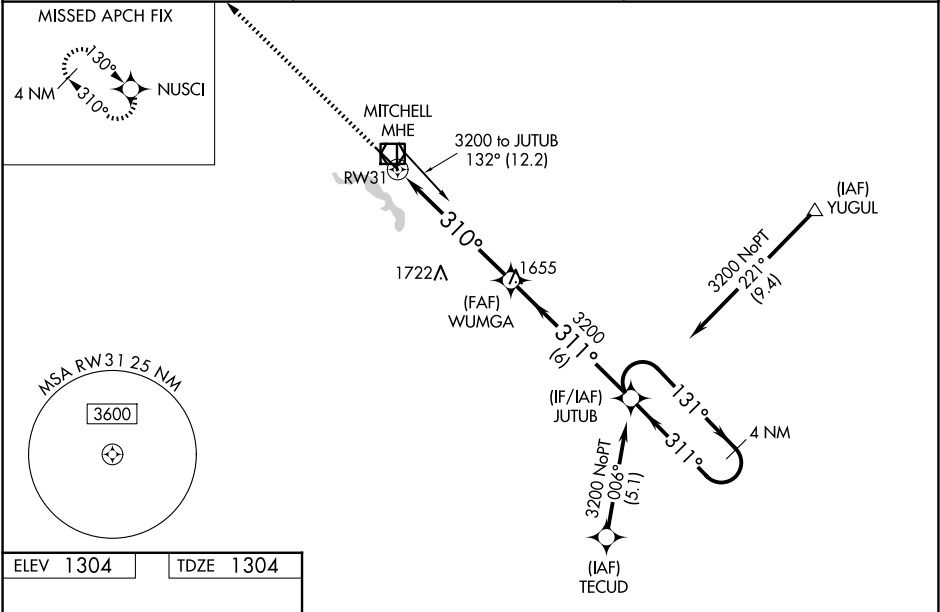
MITCHELL MUNI (MHE)

For uncompensated Baro-VNAV systems, LNAV-VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Huron Rgnl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Huron Rgnl altimeter setting and increase all DA 89 feet and all MDA 100 feet. Increase LPV all Cats visibility 1⁄8 mile. Increase LNAV/VNAV all Cats, LNAV Cats C/D and Circling Cat C visibility 1⁄4 mile. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1 mile and LNAV Cats C/D to 1 3⁄8 mile. For inop MALSR when using Huron Rgnl altimeter setting, increase LPV all Cats visibility to 1 1⁄8 mile.

MALSR

MISSED APPROACH:
Climb to 3500 direct NUSCI and hold.

ASOS 124.175	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF)
------------------------	---	-------------------------------

MITCHELL
MHE3200 to JUTUB
132° (12.2)

RW31

1722A

1655

(FAF)
WUMGA

3200

311°

(IF/IAF)
JUTUB3200 NoPT
221°
(9.4)(IAF)
YUGUL

4 NM

131°

311°

3200 NoPT
2006°
(5.1)(IAF)
TECUD

MSA RW31 2.5 NM

3600

ELEV **1304**

TDZE **1304**

3500

NUSCI

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 61).

*LNAV only

1.4 NM to RW31

3200

311°

3200

4 NM Holding Pattern

GP 3.00°
TCH 57

CATEGORY	A	B	C	D
LPV DA	1554-1⁄2 250 (300-1⁄2)			
LNAV/VNAV DA	1625-5⁄8 321 (400-5⁄8)			
LNAV MDA	1800-1⁄2	496 (500-1⁄2)	1800-1	496 (500-1)
CIRCLING	1800-1	496 (500-1)	1820-1 1⁄2 516 (600-1 1⁄2)	1860-2 556 (600-2)