

WAAS CH 57931 W27A	APP CRS 274°	Rwy Ldg 4000 TDZE 1372 Apt Elev 1376
--	------------------------	---


RNAV (GPS) RWY 27
EVELETH/VIRGINIA MUNI (EVM)

RNP APCH - GPS.


T Baro-VNAV NA when using HIB altimeter setting. Rwy 27 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Circling NA to Rwy 14 and 32. When local altimeter setting not received, use HIB altimeter setting and increase LPV DA to 1670 feet, increase LNAV/VNAV DA to 1687 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D $\frac{1}{8}$ SM.

MISSED APPROACH:
Climb to 3600 direct
ZOTU and on track
195° to HIB VOR/DME
and hold.

AWOS-3 118.825	DULUTH APP CON 125.45 233.7	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

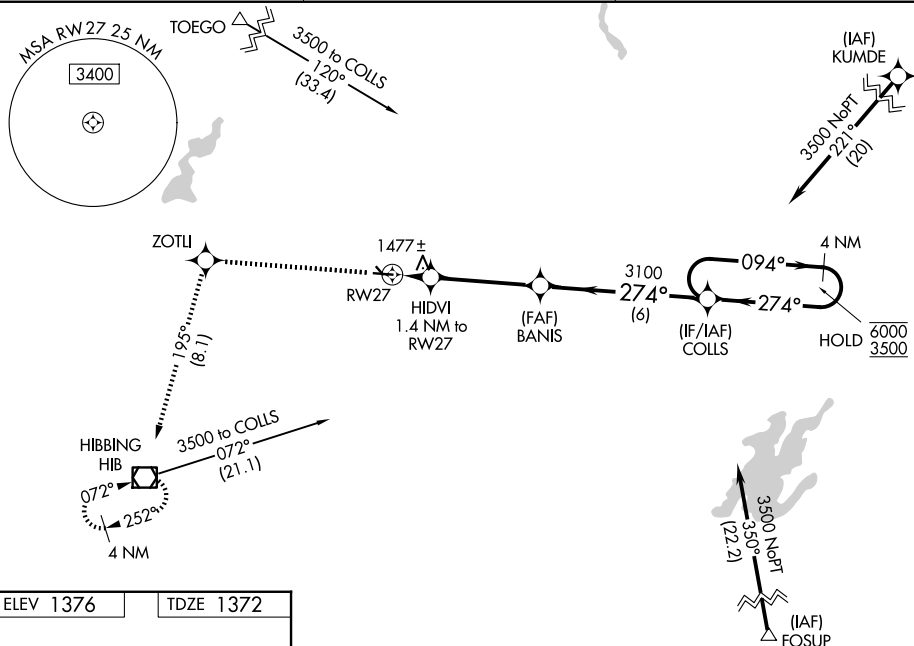

ELEV 1376		TDZE 1372
-----------	--	-----------

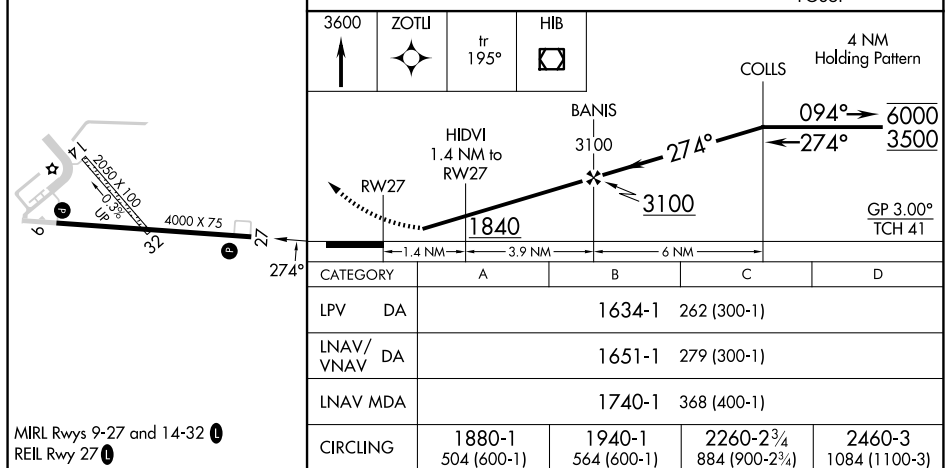

EVELETH, MINNESOTA

Orig-D 11JUN26

EVELETH/VIRGINIA MUNI (EVM)

RNAV (GPS) RWY 27

47°25'N-92°30'W

NC-1, 06 AUG 2026 to 03 SEP 2026