

WAAS CH 78314 W13A	APP CRS 131°	Rwy Ldg 6400 TDZE 1470 Apt Elev 1470
--	------------------------	---


RNAV (GPS) RWY 13

DEVILS LAKE RGNL (DVL)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Cando altimeter setting. When local altimeter setting not received, use Cando altimeter setting and increase all DA 63 feet and all MDA 80 feet, increase LPV and LNAV/VNAV all. Cats visibility ¼ mile, LNAV and Circling Cats C and D visibility ½ mile.

MISSED APPROACH: Climb to 3400 direct GRETE and hold.

AWOS-3PT 125.875	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

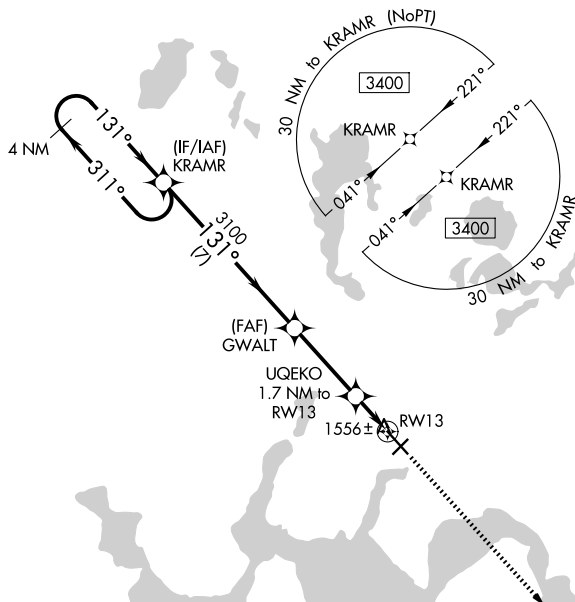

MISSED APCH FIX

GRETE 31° 4 NM

CATEGORY	A	B	C	D
LPV DA	1720-3/4 250 (300-3/4)			
RNAV/VNAV DA	1791-1 321 (400-1)			
RNAV MDA	1820-1 350 (400-1)			
CIRCLING	2000-1	530 (600-1)	2240-2 1/4 770 (800-2 1/4)	2240-2 1/2 770 (800-2 1/2)

Diagram of runway layout showing Runway 13-31, Runway 13, Runway 21, and Runway 3-21. The runway width is 6000 x 100 feet. The runway is marked with a 0.4% UP slope. The runway is also marked with a 0.4% UP slope.