

WAAS
CH **70302**
W16A

APP CRS
161°

Rwy Ldg
TDZE **192**
Apt Elev **192**

RNAV (GPS) RWY 16L

WASHINGTON MANASSAS/HARRY P DAVIS FLD (HEF)

RNP APCH - GPS.


▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 700 then climbing right turn to 3000 direct CSN VORTAC and hold.

ATIS 125.175	POTOMAC APP CON 128.525 306.925	MANASSAS TOWER ★ 133.1 (CTAF) 0 360.75	GND CON 121.8
------------------------	---	--	-------------------------

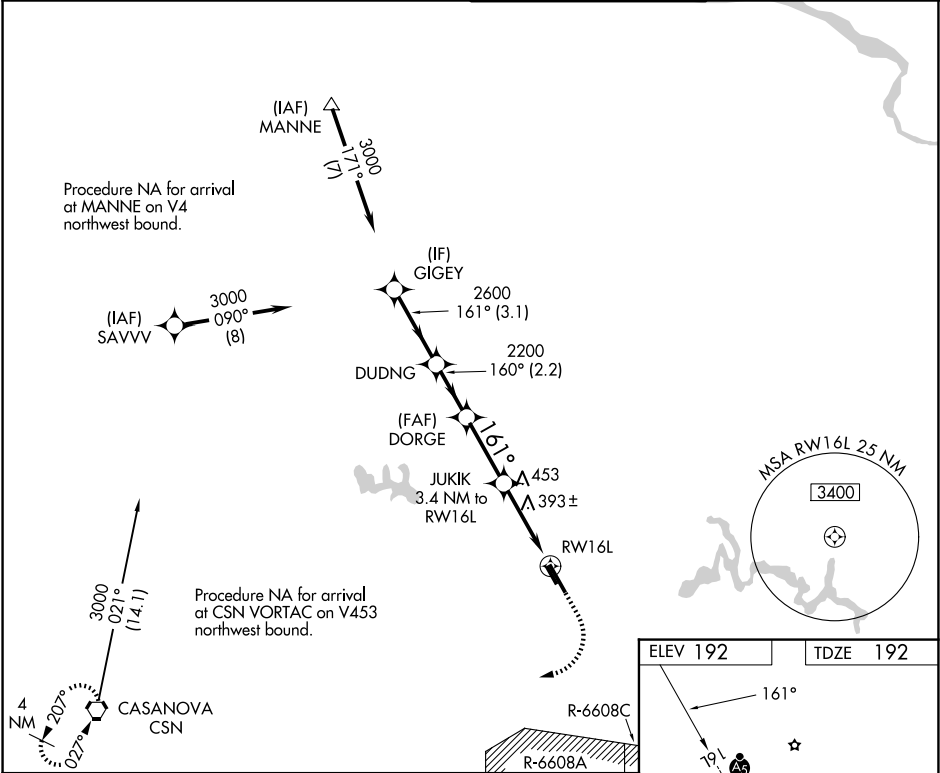

GIGEY		DUDNG	DORGE	JUKIK	CSN
3000		2600	2200	1320	3000
GP 3.00° TCH 58					
3.1 NM		2.2 NM	2.7 NM	1.3 NM	
CATEGORY	A	B	C	D	
LPV DA	442-½ 250 (300-½)				
LNAV/VNAV DA	635-7⁄8 443 (500-7⁄8)				
LNAV MDA	660-½	468 (500-½)	660-1	468 (500-1)	
CIRCLING	720-1 528 (600-1)	740-1 548 (600-1)	840-1¾ 648 (700-1¾)	880-2¼ 688 (700-2¼)	

