WAAS CH 78032 W18A	APP CRS 181°	Rwy Idg 4098 TDZE 573 Apt Elev 573

RNAV (GPS) RWY 18

SALEM-LECKRONE (SLO)

Baro-VNAV NA when using Centralia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). When local altimeter setting not received, use Centralia altimeter setting: increase LPV DA to 801 feet; increase LNAV/VNAV DA to 890 feet and visibility ⅛ SM; increase all MDAs 40 feet and LNAV Cats C/D visibility ⅛ SM and Circling Cats C/D visibility ¼ SM. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2600 direct EMLIJ and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
118.525	127.7 351.825	122.725 (CTAF) L

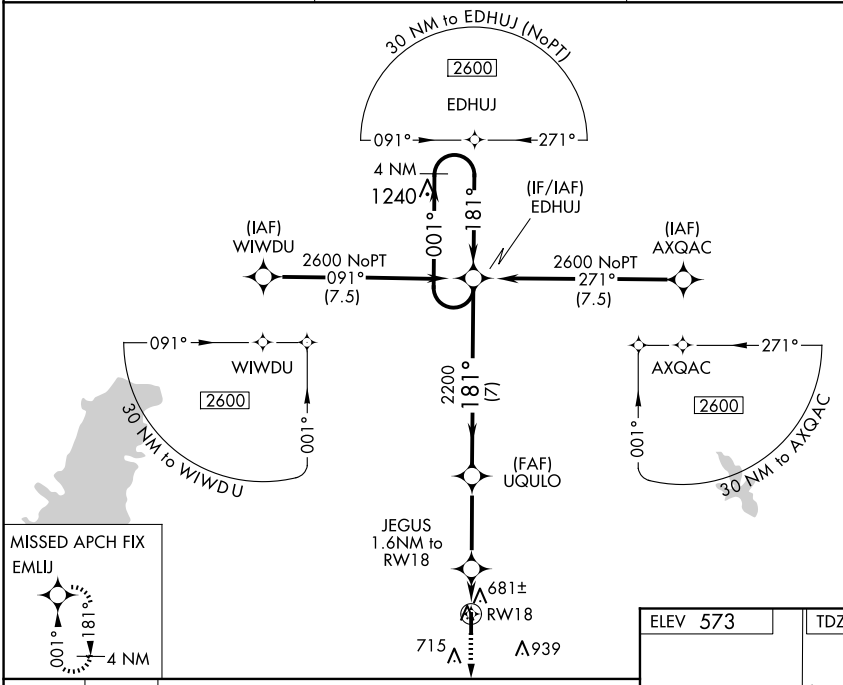

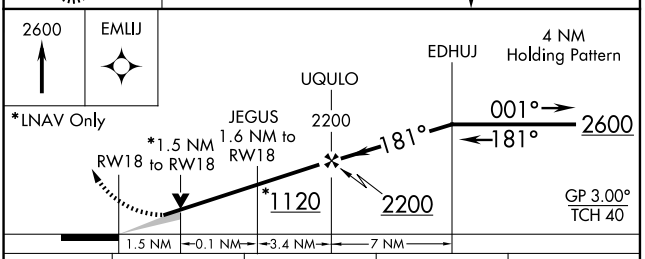

CATEGORY	A	B	C	D
LPV DA		773-1	200 (200-1)	
LNAV/VNAV DA		862-1	289 (300-1)	
LNAV MDA		940-1	367 (400-1)	
CIRCLING	1040-1 467 (500-1)		1380-2¼ 807 (900-2¼)	1380-2½ 807 (900-2½)

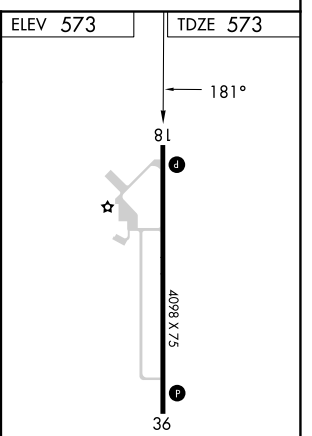

REIL Rwy 18-36 L
MIRL Rwy 18-36 L

EC-3, 06 AUG 2026 to 03 SEP 2026
EC-3, 06 AUG 2026 to 03 SEP 2026