

WAAS CH 72707 W02A	APP CRS 023°	Rwy Ldg TDZE Apt Elev
		5197 826 827

RNAV (GPS) RWY 2

JOHN F KENNEDY MEML (ASX)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C or above 54°C.
Rwy 2 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Ironwood altimeter setting. When local altimeter setting not received, use Ironwood altimeter setting and increase all DA 132 feet and all MDAs 140 feet; increase LPV all Cats and LNAV Cat C/D visibility ¾ SM, LNAV/VNAV all Cats and Circling Cat C/D visibility ½ SM.

MISSED APPROACH:
Climb to 3200 direct HOSUT and hold.

ASOS 126.775	MINNEAPOLIS CENTER 126.45 276.4	GCO 122.25	UNICOM 122.8 (CTAF) 0
------------------------	---	----------------------	--

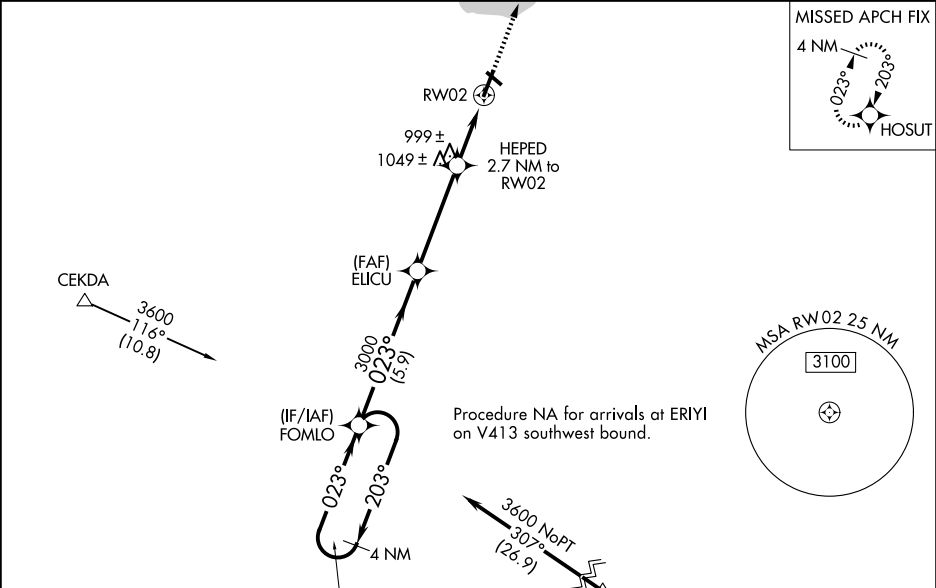

4 NM Holding Pattern

FOMLO

ELICU

HEPED 2.7 NM to RWY02

3200 HOSUT

*LNAV only

*1.4 NM to RWY02

RWY02

GP 3.00° TCH 41

5.9 NM

4 NM

1.3

1.4

CATEGORY	A	B	C	D
LPV DA		1076-1	250 (300-1)	
LNAV/VNAV DA		1103-1	277 (300-1)	
LNAV MDA	1300-1	474 (500-1)	1300-1¾ 474 (500-1¾)	
CIRCLING	1300-1	473 (500-1)	1440-1¾ 613 (700-1¾)	1560-2¼ 733 (800-2¼)

ELEV 827

TDZE 826

13

02

878

3498 X 75

0.48 UP

5197 X 100

023°

REIL Rwys 2 and 20 **0**

MIRL Rwys 2-20 and 13-31 **0**