

WAAS CH 58204 W17A	APP CRS 168°	Rwy Ldg 6501 TDZE 17 Apt Elev 17
--	------------------------	---


RNAV (GPS) RWY 17
TRENT LOTT INTL (PQL)

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.
When local altimeter setting not received, use Mobile Rgnl altimeter setting; increase LPV DA to 292 feet and LNAV/VNAV DA to 357 feet; increase LNAV/VNAV all visibilities 1/8 SM. Increase all MDA 80 feet and LNAV Cat C/D visibility 1/4 SM and Circling Cat C/D visibility 1/2 SM. Baro-VNAV and VDP NA with Mobile Rgnl altimeter setting. For inop ALS when using Mobile Rgnl altimeter setting increase LPV all Cnts visibility to 1/8 SM.

MALSR
MISSED APPROACH:
Climb to 800 then
climbing left turn to
1800 direct BEZJU
and hold.

ATIS 135.175	MOBILE APP CON★ 121.0 307.1	TRENT LOTT TOWER★ 118.575 (CTAF) 0	GND CON 121.725	UNICOM 122.8
------------------------	---------------------------------------	--	---------------------------	------------------------

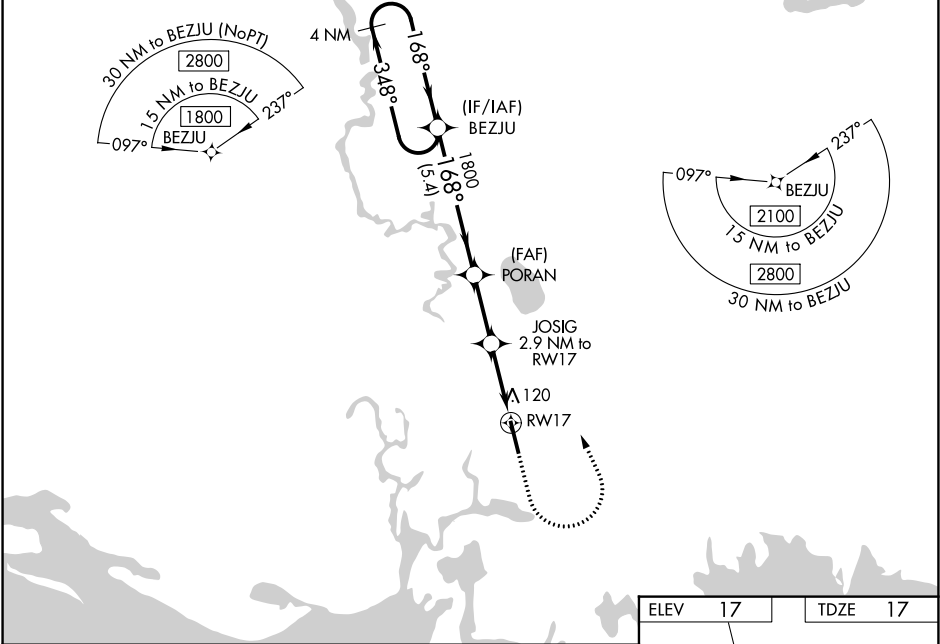

CATEGORY	A	B	C	D
LPV DA	217-½		200 (200-½)	
LNAV/VNAV DA	282-½		265 (300-½)	
LNAV MDA	380-½	363 (400-½)	380-⅝	363 (400-⅝)
CIRCLING	480-1 463 (500-1)	680-1 663 (700-1)	680-1¾ 663 (700-1¾)	680-2 663 (700-2)

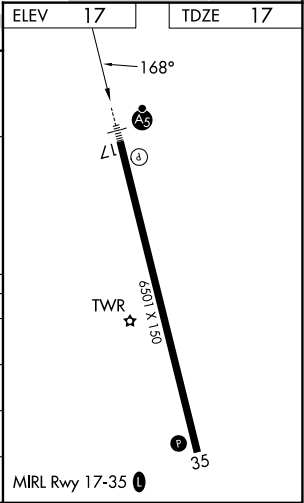

SC-4, 06 AUG 2026 to 03 SEP 2026

SC-4, 06 AUG 2026 to 03 SEP 2026