

WAAS CH 72904 W35A	APP CRS 348°	Rwy Ldg TDZE 17 Apt Elev 17
--	------------------------	---

RNAV (GPS) RWY 35

TRENT LOTT INTL (PQL)



▼

▲

Baro-VNAV NA when using Mobile Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Mobile Rgnl altimeter setting and increase LPV DA to 342 feet, LNAV/VNAV DA to 422 feet, and all MDA 80 feet; increase LPV and LNAV/VNAV visibility ¼ mile all Cots. Increase LNAV visibility Cots C/D ½ mile and Circling visibility Cots C/D ½ mile.

MISSED APPROACH: Climb to 1800 direct BEZJU and hold.

ATIS 135.175	MOBILE APP CON★ 121.0 307.1	TRENT LOTT TOWER★ 118.575 (CTAF) 0	GND CON 121.725	UNICOM 122.8
------------------------	---------------------------------------	--	---------------------------	------------------------

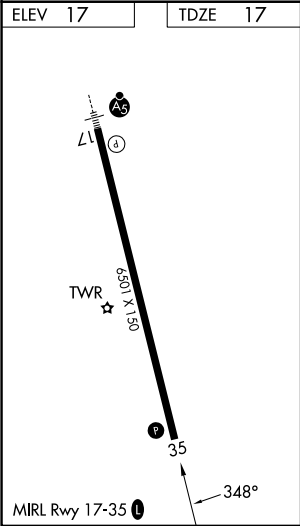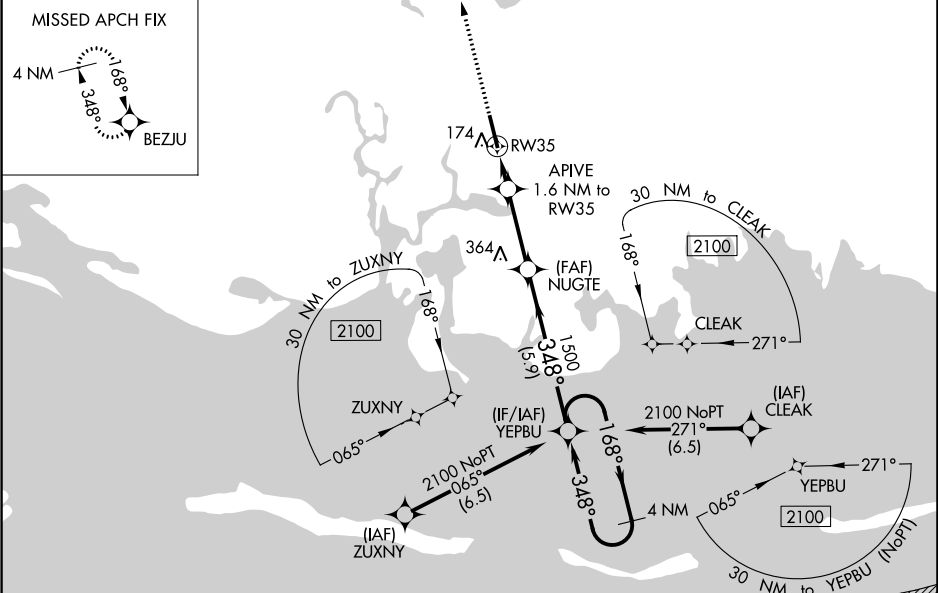

1800	BEZJU	NUGTE	YEPBU	4 NM Holding Pattern
*LNAV only.	APIVE 1.6 NM to RW35	1500	168° → 2100	GP 3.00° TCH 40
RW35	*560	1500	← 348°	
1.6 NM	2.9 NM	5.9 NM		
CATEGORY	A	B	C	D
LPV DA	267- ⁷ / ₈ 250 (300- ⁷ / ₈)			
LNAV/VNAV DA	347-1 ¹ / ₈ 330 (400-1 ¹ / ₈)			
LNAV MDA	440-1	423 (500-1)	440-1 ¹ / ₄	423 (500-1 ¹ / ₄)
CIRCLING	480-1 463 (500-1)	680-1 663 (700-1)	680-1 ³ / ₄ 663 (700-1 ³ / ₄)	680-2 663 (700-2)