

WAAS
CH **53641**
W23A

APP CRS
228°

Rwy Ldg
TDZE
927
Apt Elev
927

RNAV (GPS) RWY 23

LAKE CUMBERLAND RGNL (SME')

RNP APCH - GPS.

▼

⚠


Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Monticello altimeter setting and increase all MDAs 60 feet and LNAV visibility Cat B/C/D ½ SM, and LP visibility Cat C/D ⅓ SM, and Circling visibility Cat B ¼ SM. VDP NA when using Monticello altimeter setting.

MISSED APPROACH:
Climb to 3600 direct
TOOLY and hold.

AWOS-3
120.05

INDIANAPOLIS CENTER
124.625 371.925

UNICOM
122.8 (CTAF) 1

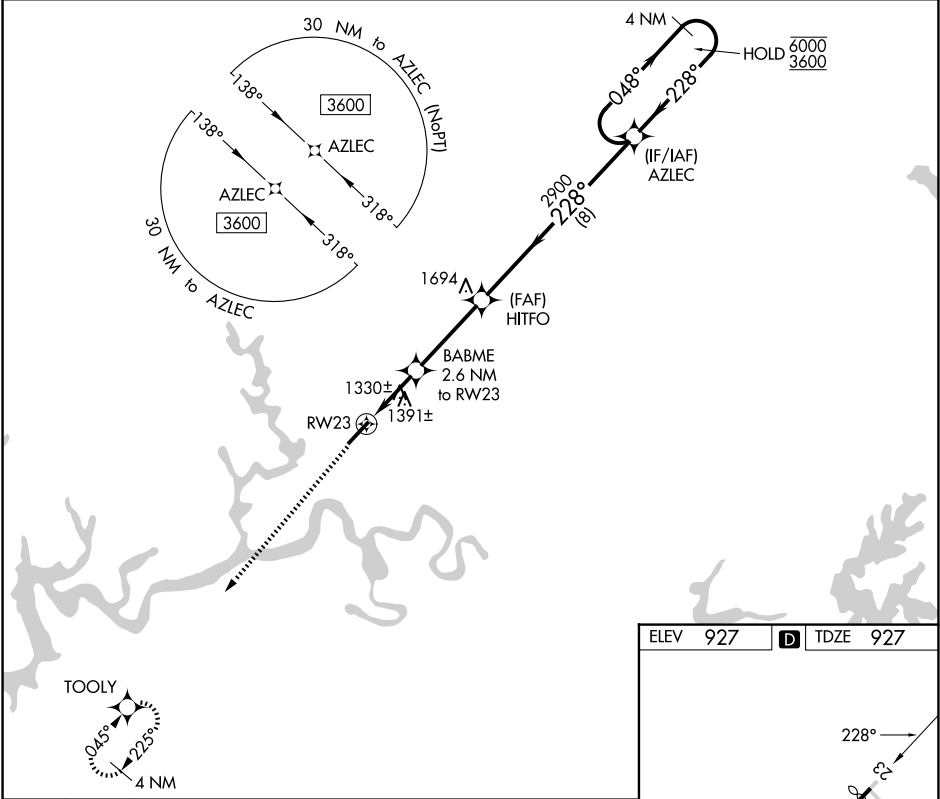

3600 TOOLY

↑

✧

BABME 2.6 NM to RW23

HITFO

AZLEC 4 NM Holding Pattern

048° → 6000

← 228° 3600

1820

1.9 NM to RW23

0.7 NM

3.4 NM

8 NM

CATEGORY	A	B	C	D
LP MDA	1580-1	653 (700-1)	1580-1⅞	653 (700-1⅞)
LNAV MDA	1660-1	733 (800-1)	1660-2	733 (800-2)
CIRCLING	1660-1 733 (800-1)	1700-1 773 (800-1)	2100-3	1173 (1200-3)

MIRL Rwy 5-23 1

REIL Rwys 5 and 23 1