

WAAS CH 97321 W01A	APP CRS 010°	Rwy Ldg 5101 TDZE 626 Apt Elev 638
--	------------------------	---


RNAV (GPS) RWY 1L
TULSA RIVERSIDE (RVS)

RNP APCH - GPS.

▼ Circling NA northeast of Rwy 31 and 19L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using TUL altimeter setting. When local altimeter setting not received, use TUL altimeter setting: increase LPV DA to 871 feet; increase LNAV/VNAV DA to 1152 feet and all visibilities ½ SM. Increase all MDAs 40 feet and Circling visibility Cat C ½ SM.

MISSED APPROACH: Climb to 1100 then climbing left turn to 2600 direct KEVIL and hold.

ATIS 126.5	TULSA APP CON 134.7	RIVERSIDE TOWER ★ 120.3 (CTAF) 0	GND CON 121.7	UNICOM 122.95
----------------------	-------------------------------	---	-------------------------	-------------------------

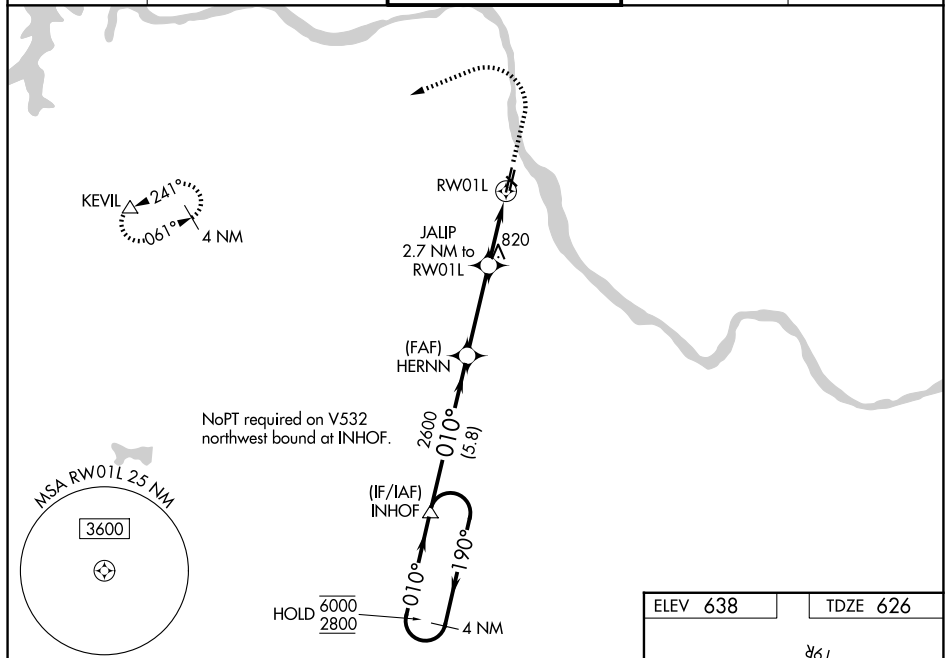

CATEGORY	A	B	C	D
LPV DA	845- $\frac{3}{4}$		219 (300- $\frac{3}{4}$)	
LNAV/VNAV DA	1126-1 $\frac{3}{8}$		500 (500-1 $\frac{3}{8}$)	
LNAV MDA	1080-1	454 (500-1)	1080-1 $\frac{3}{8}$	454 (500-1 $\frac{3}{8}$)
CIRCLING	1260-1 622 (700-1)	1280-1 642 (700-1)	1280-1 $\frac{3}{4}$ 642 (700-1 $\frac{1}{4}$)	1380-2 $\frac{1}{2}$ 742 (800-2 $\frac{1}{2}$)

