

LOC I-PHN <u>110.9</u>	APP CRS 043°	Rwy Ldg 5104 TDZE 647 Apt Elev 650
----------------------------------	------------------------	---

ILS or LOC RWY 4
ST CLAIR COUNTY INTL (PHN)

T ADF required. When local altimeter setting not received, use Troy altimeter setting and increase all DA 95 feet and all MDA 100 feet; increase S-LOC 4 Cats C and D and Circling Cats C and D visibility $\frac{1}{4}$ mile. For inop MALSR when using Troy altimeter setting, increase S-LS 4 all Cats visibility to $\frac{3}{8}$ mile. Night landing: Rwy 10, 22, 28 NA.


MALSR





MISSED APPROACH: Climb to 2500 then climbing left turn to 4000 direct PHURN LOM and hold, continue climb-in-hold to 4000.

AWOS-3P
118.375

SELFRIDGE APP CON ★
119.6 391.9

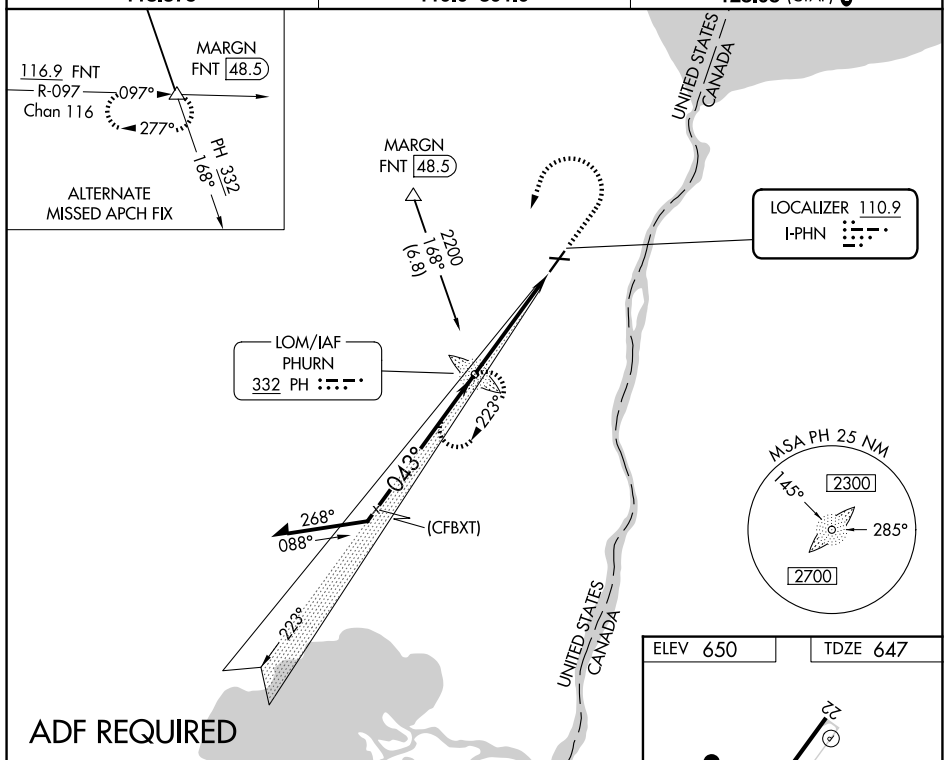UNICOM
123.05 (CTAF) 

ADF REQUIRED

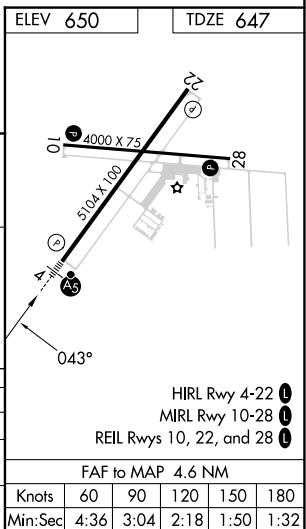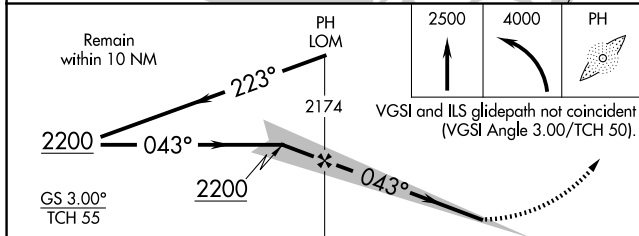

				
CATEGORY	A	B	C	D
S-ILS 4	847-1/2 200 (200-1/2)			
S-LOC 4	1100-1/2 453 (500-1/2)		1100-7/8 453 (500-7/8)	
CIRCLING	1160-1 510 (600-1)		1260-13/4 610 (700-13/4)	1260-2 610 (700-2)