


LOC/DME I-OND 111.55 Chan 52 (Y)	APP CRS 267°	Rwy Ldg TDZE 95 Apt Elev 96
--	------------------------	---

ILS or LOC RWY 26R
GEORGE BUSH INT CNTL/HOUSTON (IAH)

DME required. From HOOTI: RNAV 1-GPS required.  Simultaneous approach authorized with Rwy 26L and Rwy 27. For inop ALS, increase S-ILS 26R Cat E visibility to RVR 4000, and S-LOC 26R Cat C/D/E visibility to 1 3/8 SM.	ALS F-2 	MISSED APPROACH: Climb to 600 then climbing right turn to 3000 on IAH VORTAC R-344 to PEPBI INT/IAH 20 DME and hold.
--	--	--

D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 E 124.35 316.15 W	HOUSTON TOWER 120.725 290.2	GND CON 118.575
-------------------------	--	---------------------------------------	---------------------------

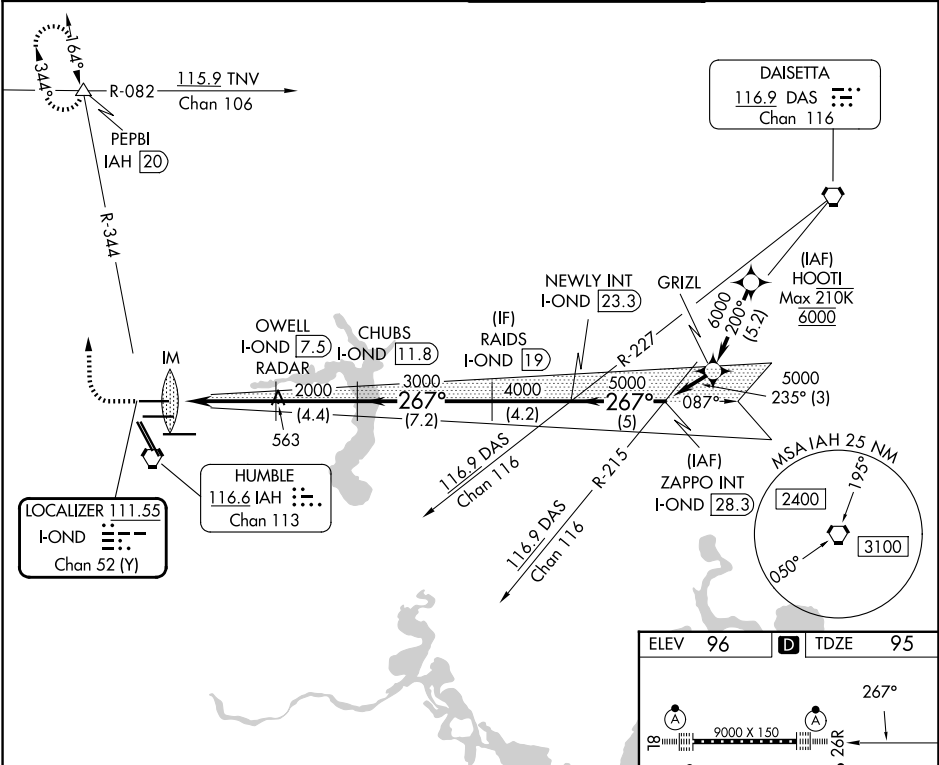

600 ↑ 3000 IAH R-344 PEPBI △	OWELL I-OND 7.5 RADAR	CHUBS I-OND 11.8	RAIDS I-OND 19	NEWLY INT I-OND 23.3	ZAPPO INT I-OND 28.3	ELEV 96 D TDZE 95
* LOC only	IM I-OND 1.7	* I-OND 2.9	2000	3000	4000	5000
GS 3.00° TCH 59	0.1	1.1	4.6 NM	4.4 NM	7.2 NM	4.2 NM
5 NM						
CATEGORY	A	B	C	D	E	
S-ILS 26R	295/18 200 (200-1/2)					
S-LOC 26R	580/24	485 (500-1/2)	580/50	485 (500-1)	FAF to MAP 5.8 NM	
Knots		60	90	120	150	180
Min:Seq		5:48	3:52	2:54	2:19	1:56