

LOC/DME I-MDK <u>111.75</u> Chan 54 (Y)	APP CRS 168°	Rwy Ldg 8605 TDZE 27 Apt Elev 27
---	------------------------	---

ILS or LOC RWY 17L
SACRAMENTO INTL (SMF)

Aircraft not GPS equipped - RADAR required for procedure entry.
DME or RADAR required. RNP APCH-GPS. From TENCO.

T Simultaneous approach authorized. Circling NA west of Rwy 17L-35R.
A For inop ALS, increase S-LOC 17L Cat C/D visibility to 1 3/8 SM and
 JOBUD fix minimums S-LOC 17L Cat C/D visibility to RVR 4500.

MALSR



MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct SAC VORTAC and hold.

D-ATIS 126.75	NORCAL APP CON 125.4 259.1 (W-NE) 125.25 257.9 (SW) 127.4 317.5 (E-SE)	CAPITOL TOWER 125.7 256.7	GND CON 121.7 256.7
-------------------------	---	-------------------------------------	-------------------------------

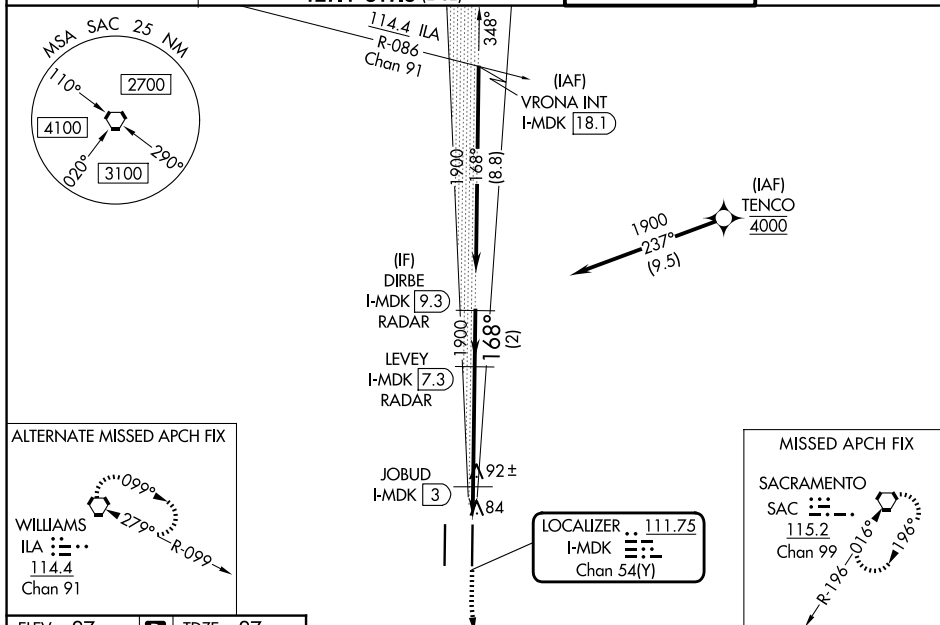


Diagram illustrating the Jobud VOR/DME station and associated approach paths. Key distances and altitudes are marked:

- 0.8 NM, 0.6 NM, 4.3 NM, 2 NM
- Altitudes: 500, 1900, 168
- Distances: 1.6, 2.4, 3.00, 7.3, 9.3
- Angles: 168°
- GS 3.00° TCH 55