

APP CRS
233°

Rwy Ldg
TDZE
798

Apt Elev
802

RNAV (GPS) RWY 23

LENAWEE COUNTY (ADG)

RNP APCH - GPS


▼

▲

Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ann Arbor Muni altimeter setting: increase all MDA 80 feet and visibility LNAV Cats C/D and Circling Cats C/D ¼ SM. Circling NA to Rwys 11 and 29.

MISSED APPROACH: Climb to 3000 direct OBIHI and hold.

ASOS 118.825	TOLEDO APP CON 134.35 317.55	UNICOM 122.8 (CTAF) 0
-----------------	---------------------------------	--------------------------

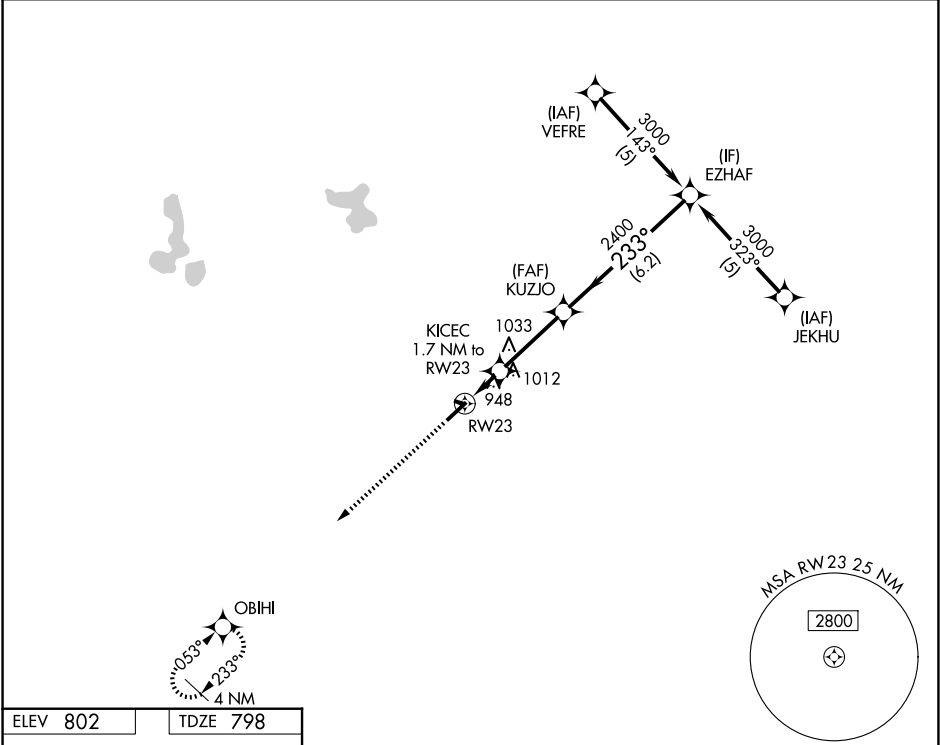

ELEV 802

TDZE 798

3000

OBIHI

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 32).

3000

EZHAF

233°

3000

KUZJO

2400

3.04° TCH 45

1380

1.7 NM

3.1 NM

6.2 NM

CATEGORY	A	B	C	D
LNAV MDA	1260-1	462 (500-1)	1260-1½ 462 (500-1½)	1260-1½ 462 (500-1½)
CIRCLING	1300-1 498 (500-1)	1320-1 518 (600-1)	1340-1½ 538 (600-1½)	1440-2 638 (700-2)

EC-1, 06 AUG 2026 to 03 SEP 2026

EC-1, 06 AUG 2026 to 03 SEP 2026