

WAAS	APP CRS	Rwy Idg	5000
CH 86505	057°	TDZE	303
W06A		Apt Elev	303

RNAV (GPS) RWY 6



WOODWARD FLD (CDN)

RNP APCH - GPS.

▼ Baro-VNAV and VDP NA when using CAE altimeter setting. When local altimeter setting not received, use CAE altimeter setting: increase LPV DA to 673 feet; increase LNAV/VNAV DA to 804 feet; increase all MDAs 100 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ½ SM, and Circling visibility Cats C/D ½ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Circling Rwy 14, 32 NA at night.

MISSED APPROACH:
Climb to 3000 direct
IBAYE and hold.

AWOS-3PT 119.975	SHAW APP CON ★ 125.4 318.1	UNICOM 123.0 (CTAF) 0
---------------------	-------------------------------	--------------------------

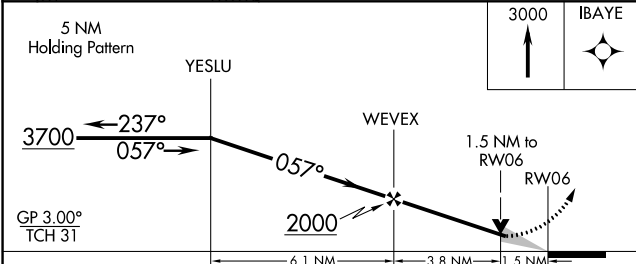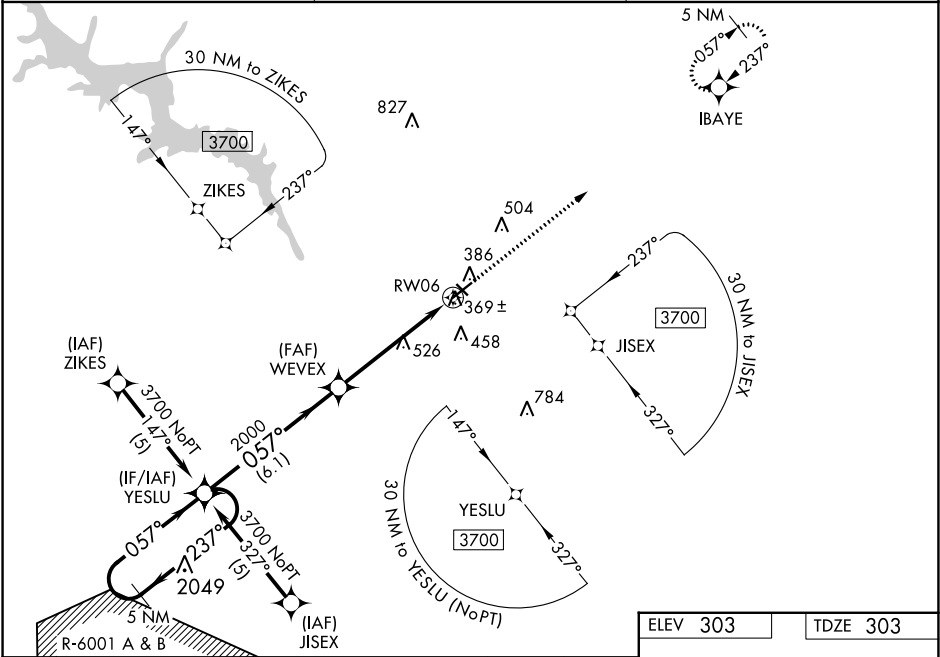

ELEV 303	TDZE 303
----------	----------

CATEGORY	A	B	C	D
LPV DA	583-1 280 (300-1)			
LNAV/VNAV DA	714-1½ 411 (500-1½)			
LNAV MDA	780-1 477 (500-1)	780-1⅜ 477 (500-1⅜)	780-1½ 477 (500-1½)	
CIRCLING	840-1 537 (600-1)	840-1½ 537 (600-1½)	900-2 597 (600-2)	

