
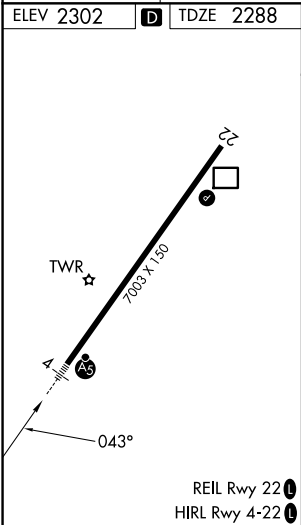


WAAS CH 42613 W04A	APP CRS 043°	Rwy Ldg TDZE 2288 Apt Elev 2302
--	------------------------	---

RNAV (GPS) RWY 4

GREENBRIER VALLEY (LWB)

RNP APCH.				MALSR	MISSED APPROACH: Climb to 6300 direct HODFU and hold, continue climb-in-hold to 6300.
Rwy 4 helicopter visibility reduction below ¾ NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV Cats A/B visibilities to 1 SM, Cats C/D to 1½ SM, and increase LPV all Cats visibilities to ¾ SM.					
ATIS 121.4	WASHINGTON CENTER 125.725 134.4 353.9		LEWISBURG TOWER ★ 118.9 (CTAF) 0	GND CON 121.9	UNICOM 122.95

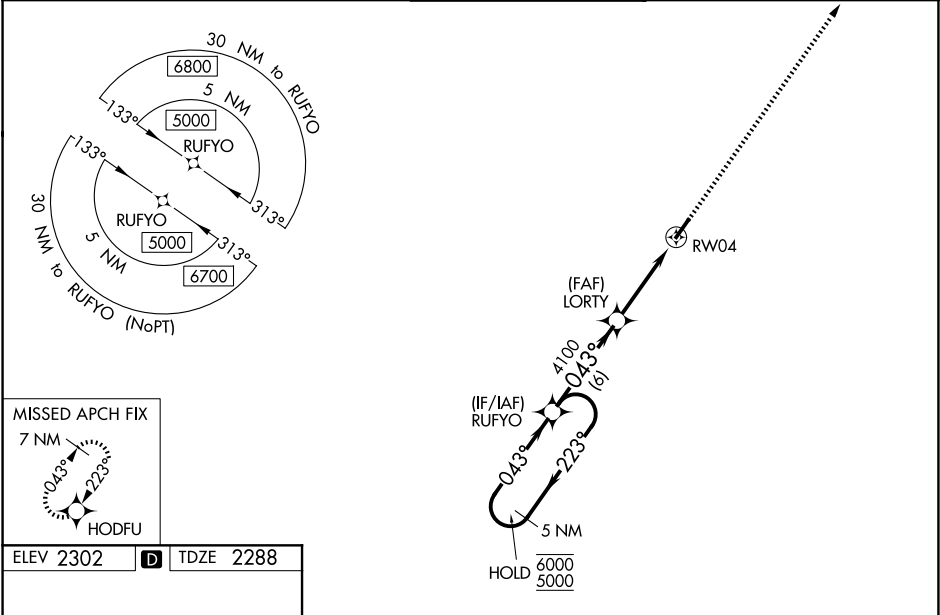

5 NM

Holding Pattern

6000

5000

←223°

→043°

GP 3.00°

TCH 51

RUFYO

LORTY

4100

4100

043°

043°

4100

6300

HODFU

↑

✦

*LNAV only.

*1.3 NM to RW04

RW04

6 NM

4.2 NM

1.3

CATEGORY	A		B		C		D	
LPV DA			2559-¾		271 (300-¾)			
LNAV/VNAV DA			2738-⅞		450 (500-⅞)			
LNAV MDA	2760-¾		472 (500-¾)		2760-1		472 (500-1)	
CIRCLING	2840-1 538 (600-1)		3040-1 738 (800-1)		3280-3 978 (1000-3)		3680-3 1378 (1400-3)	