

WAAS CH 42508 W30A	APP CRS 295°	Rwy Ldg 7002 TDZE 5628 Apt Elev 5673
--	------------------------	---

RNAV (GPS) RWY 30L


ROCKY MOUNTAIN METRO (BJC)

TANA


Baro-VNAV and VDP NA when using Denver Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Denver Intl altimeter setting and increase all DA 82 feet and all MDA 100 feet. Increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C/D and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 6300 then climbing right turn to 10300 direct HYGEM and hold, continue climb-in-hold to 10300.


ATIS 126.25	DENVER APP CON 125,125 263,025	METRO TOWER* 118.6 (CTAF) 233.7	GND CON 121.7
-----------------------	--	---	-------------------------

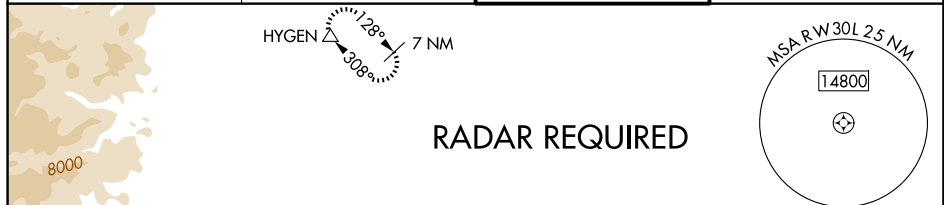

RADAR REQUIRED

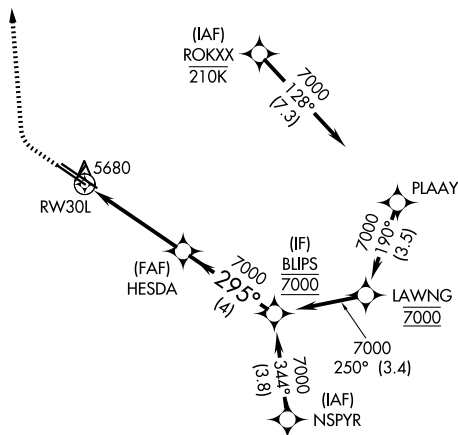

ELEV	5673	D	TDZE	5628
------	------	----------	------	------

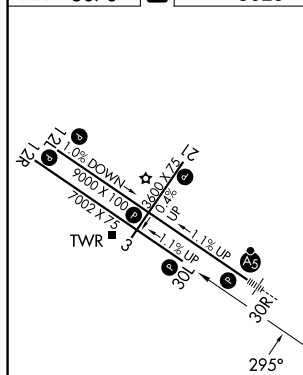

6300 		10300 		HYGEN 		HESDA 7000		BLIPS	
*LNAV only.		* 1 NM to RW30L				7000 GP 3.00° TCH 41			
CATEGORY		A		B		C		D	
LPV DA		5828- ³ / ₄		200 (200- ³ / ₄)					
LNAV/VNAV DA		5926-1 ¹ / ₂		298 (300-1 ¹ / ₂)					
LNAV MDA		5960-1		332 (300-1)					
CIRCLING		6180-1 507 (600-1)		6240-1 567 (600-1)		6360-2 687 (700-2)		6860-3 1187 (1200-3)	