
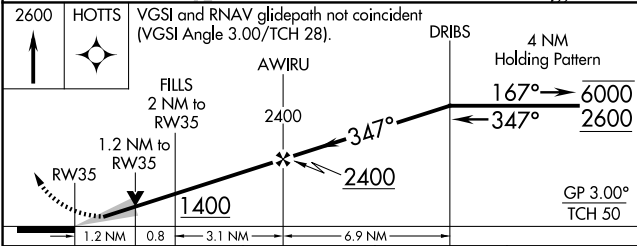


WAAS CH 70741 W35A	APP CRS 347°	Rwy Ldg TDZE 722 Apt Elev 722
--	------------------------	---


RNAV (GPS) RWY 35
FORT MADISON MUNI (F'SW)

RNP APCH - GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using BRL altimeter setting. When local altimeter setting not received, use BRL altimeter setting; increase LPV DA to 1004 feet; increase LNAV/VNAV DA to 1190 feet and all visibilities 1/8 SM; increase all MDAs 40 feet and LNAV visibility Cats C and D 1/4 SM, and Circling visibility Cat D 1/4 SM.	MISSED APPROACH: Climb to 2600 direct HOTTs and hold.
---	---

AWOS-3 120.925	CHICAGO CENTER 135.6 316.1	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	---------------------------------

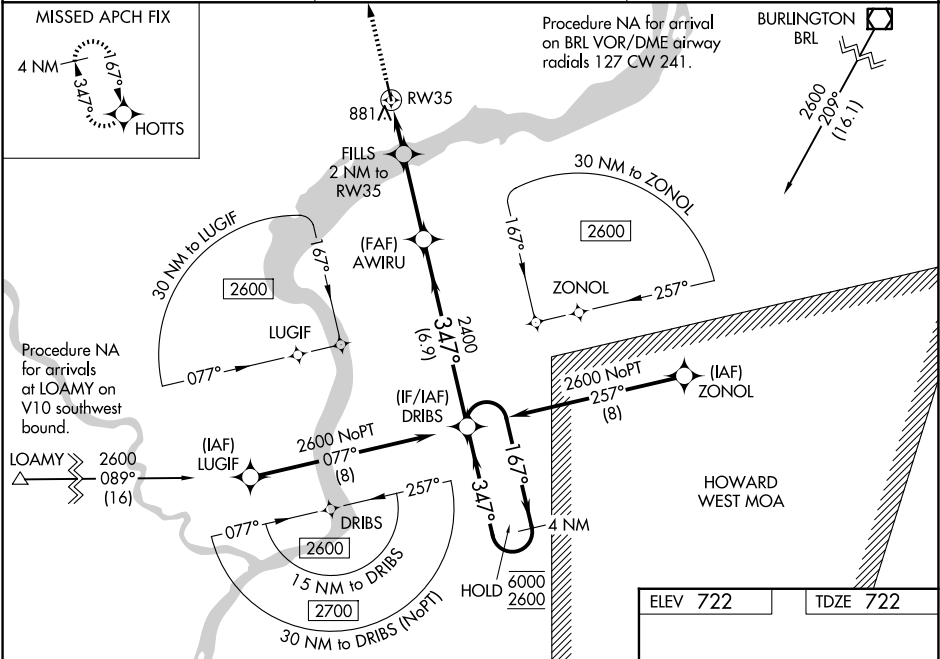

CATEGORY	A	B	C	D
LPV DA	972-1	250 (300-1)		
LNAV/VNAV DA	1158-1 1/4	436 (500-1 1/4)		
LNAV MDA	1140-1	418 (500-1)	1140-1 1/8	418 (500-1 1/8)
CIRCLING	1200-1	478 (500-1)	1260-1 1/2	1500-2 1/2

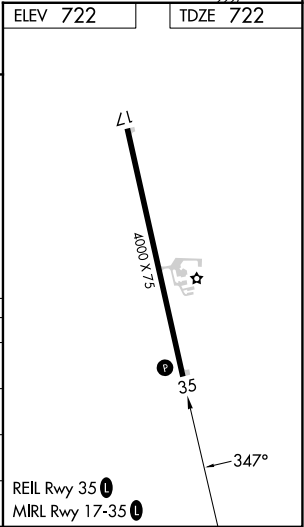

NC-3, 06 AUG 2026 to 03 SEP 2026

NC-3, 06 AUG 2026 to 03 SEP 2026