
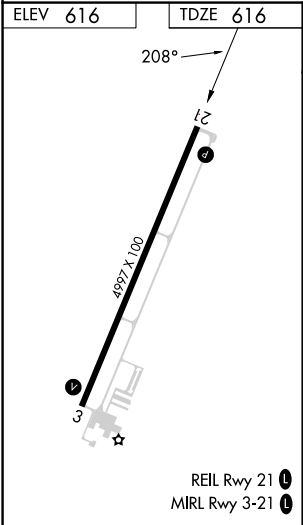


RNP APCH - GPS.			⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. When local altimeter setting not received, use Detroit Metro Wayne County altimeter setting: increase LPV DA to 1011 feet; increase LNAV/VNAV DA 1054 feet; increase all MDAs 60 feet and visibility LNAV Cat C and Circling Cat C/D ¼ SM. Baro-VNAV and VDP NA when using Detroit Metro Wayne County altimeter setting. Circling to Rwy 3 NA at night.
AWOS-3P 119.075	DETROIT APP CON 134.3 363.2	UNICOM 122.7 (CTAF) 0	

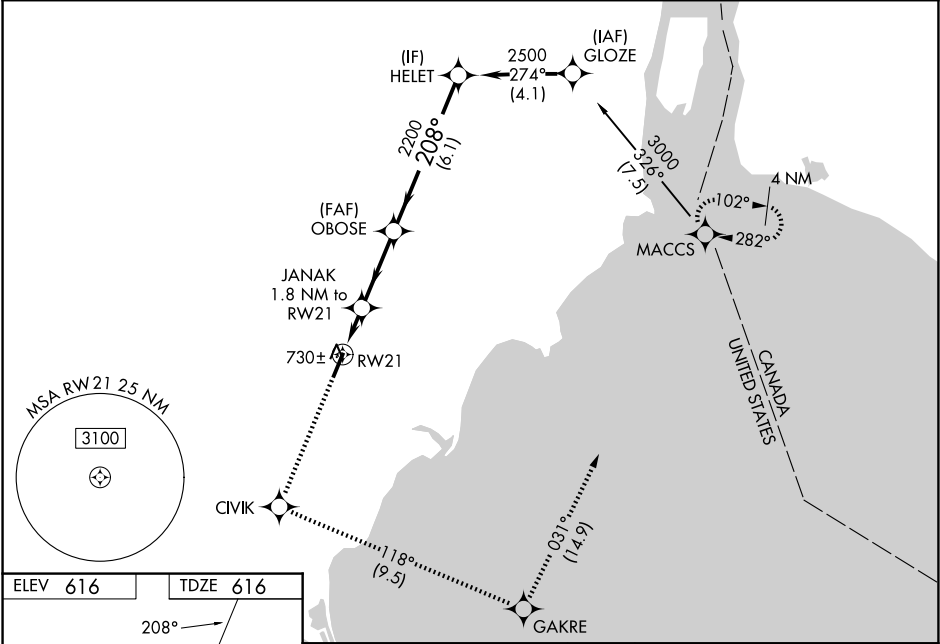

3000	CIVIK	tr 118°	GAKRE	tr 031°	MACCS	VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 49).		HELET
						OBOSE		
* LNAV only.		JANAK 1.8 NM to RW21		2200		208°		2500
		*0.9 NM to RW21				2200		GP 3.00° TCH 42
		0.9 NM		3 NM		6.1 NM		
CATEGORY	A		B		C		D	
LPV DA	966-1¼ 350 (400-1¼)							
LNAV/VNAV DA	1009-1½ 393 (400-1½)							
LNAV MDA	980-1 364 (400-1)							980-1¼ 364 (400-1¼)
CIRCLING	1120-1 504 (600-1)		1180-1 564 (600-1)		1380-2¼ 764 (800-2¼)		1380-2½ 764 (800-2½)	