

WAAS
CH **93528**
W36A

APP CRS
003°

Rwy Ldg
TDZE
Apt Elev

5001
343
343

RNAV (GPS) RWY 36

NACOGDOCHES A L MANGHAM JR RGNL (OCH)

RNP APCH-GPS.

▼


Baro-VNAV NA when using LFK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C . When local altimeter setting not received, use LFK altimeter setting: Increase LPV DA to 598 feet; increase LNAV/VNAV DA to 680 feet; increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, and Circling visibility Cat C ¼ SM.

MALSR

AS

MISSED APPROACH: Climb to 2400 direct XOWNU and on track 356° to DRBOB and hold.

AWOS-3PT 135.625	HOUSTON CENTER 125.175 285.575	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

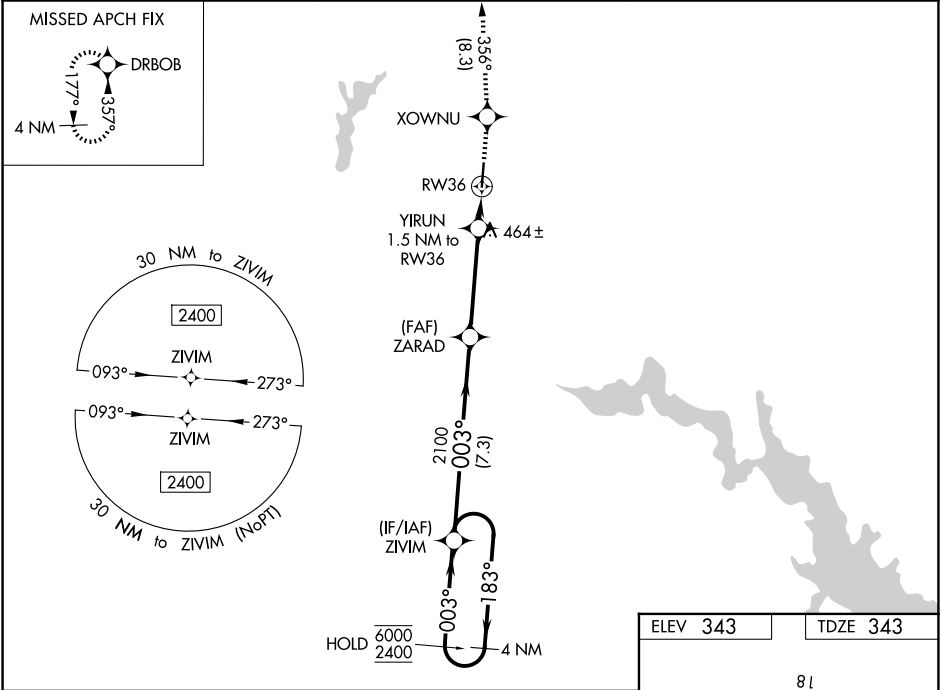

4 NM Holding Pattern

6000

2400

←183°

→003°

GP 3.00°

TCH 53

ZIVIM

ZARAD

2100

YIRUN

1.5 NM to RW36

840

RW36

7.3 NM

3.9 NM

1.5 NM

2400 XOWNU

↑

fr 356°

DRBOB

CATEGORY	A	B	C	D
LPV DA	543-½	200 (200-½)		NA
LNAV/VNAV DA	625-½	282 (300-½)		NA
LNAV MDA	720-½	377 (400-½)	720-⅝ 377 (400-⅝)	NA
CIRCLING	860-1	517 (600-1)	1080-2 737 (800-2)	NA

81

5001 X 75

36

003°

REIL Rwy 18 0

MIRL Rwy 18-36 0