

WAAS CH 56504 W36A	APP CRS 356°	Rwy Idg 4403 TDZE 918 Apt Elev 918
--	------------------------	---

RNAV (GPS) RWY 36

FORT SCOTT MUNI (F'SK)


⚠

NA

When local altimeter setting not received, use Chanute altimeter setting and increase all DAs 93 feet and all MDAs 100 feet; increase Circling Cat C/D visibility ½ SM. Baro-VNAV NA when using Chanute altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 3000 direct ECARO and hold.

AWOS-3P 124.425	KANSAS CITY CENTER 125.55 327.0	UNICOM 122.8 (CTAF) 0
---------------------------	---	--

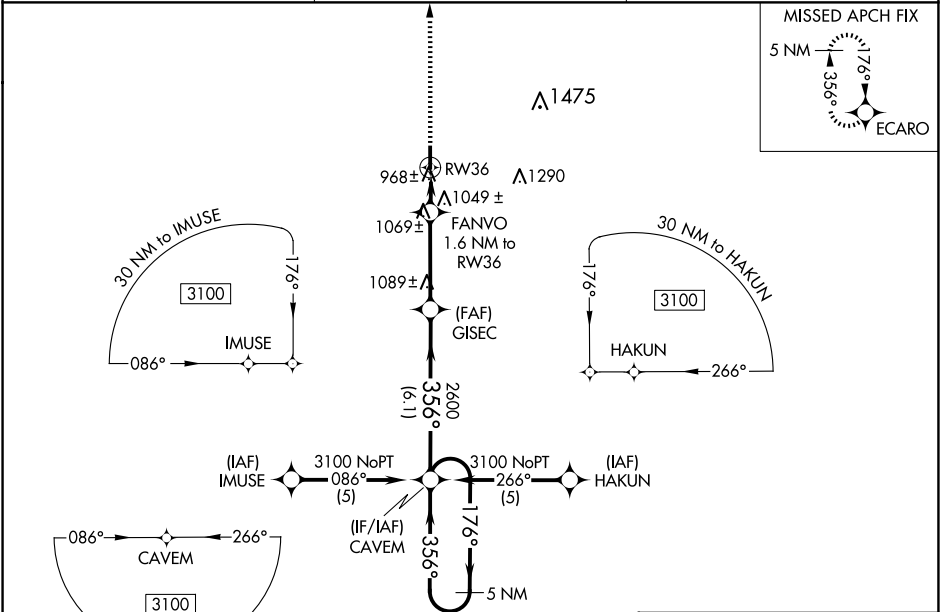

3000

ECARO

*LNAV only

FANVO 1.6 NM to RW36

RW36

1460*

1.6 NM

3.5 NM

6.1 NM

CAVEM

GISEC

356°

176°

3100

GP 3.00°

TCH 39

CATEGORY	A	B	C	D
LPV DA	1189-1 271 (300-1)			
LNAV/ VNAV DA	1240-1¼ 322 (400-1¼)			
LNAV MDA	1320-1 402 (500-1)	1320-1¼ 402 (500-1¼)		
CIRCLING	1320-1 402 (500-1)	1380-1 462 (500-1)	1640-2 722 (800-2)	1640-2¼ 722 (800-2¼)

ELEV 918

TDZE 918

REIL Rwy 18 and 36

MIRL Rwy 18-36

81

4403 X 75

0.3% UP

36

356° to RW36

NC-2, 06 AUG 2026 to 03 SEP 2026

NC-2, 06 AUG 2026 to 03 SEP 2026