



VOR/DME PUT 117.4 Chan 121	APP CRS 211°	Rwy Idg TDZE Apt Elev	N/A N/A 238
--	------------------------	-----------------------------	--


VOR-A
DANIELSON (LZD)

T When local altimeter setting not received, use Willimantic altimeter
A NA setting and increase SNAPO fix minimums Cat B MDA 40 feet.
 Procedure NA at night. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing right turn to 2600 direct PUT VOR/DME and hold.

AWOS-3 119.125	UD ASOS 133.675	PROVIDENCE APP CON ★ 123.675 244.875	UNICOM 123.0 (CTAF) U
--------------------------	---------------------------	--	--

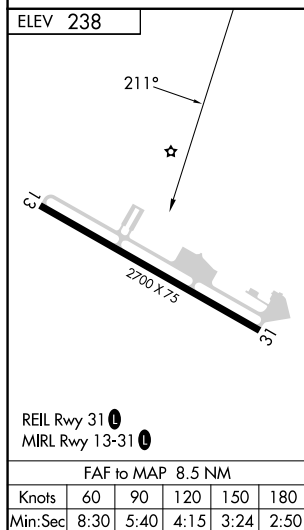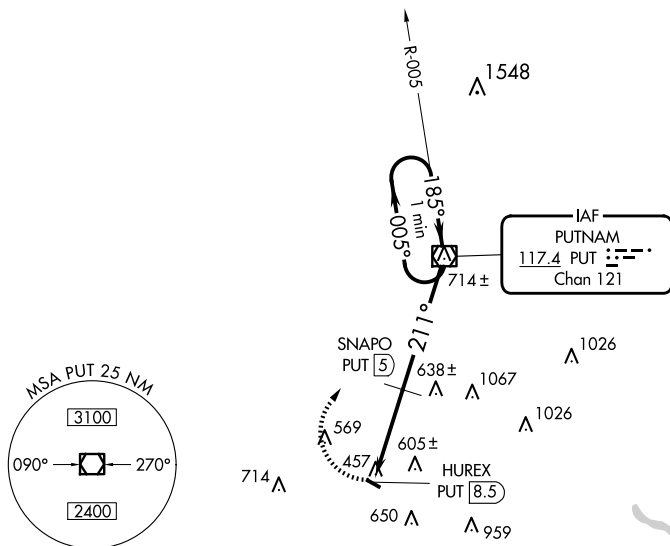

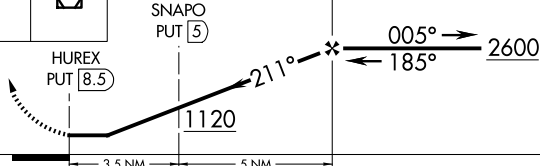2600 		PUT 		
		SNAPO PUT 5		
HUREX PUT 8.5		PUT VOR/DME		
One Minute Holding Pattern		005° → 2600 ← 185°		
1120		211°		
3.5 NM		5 NM		
CATEGORY	A	B	C	D
CIRCLING	1120-1¼	882 (900-1¼)	NA	
SNAPO FIX MINIMUMS				
CIRCLING	900-1 662 (700-1)	1080-1¼ 842 (900-1¼)	NA	