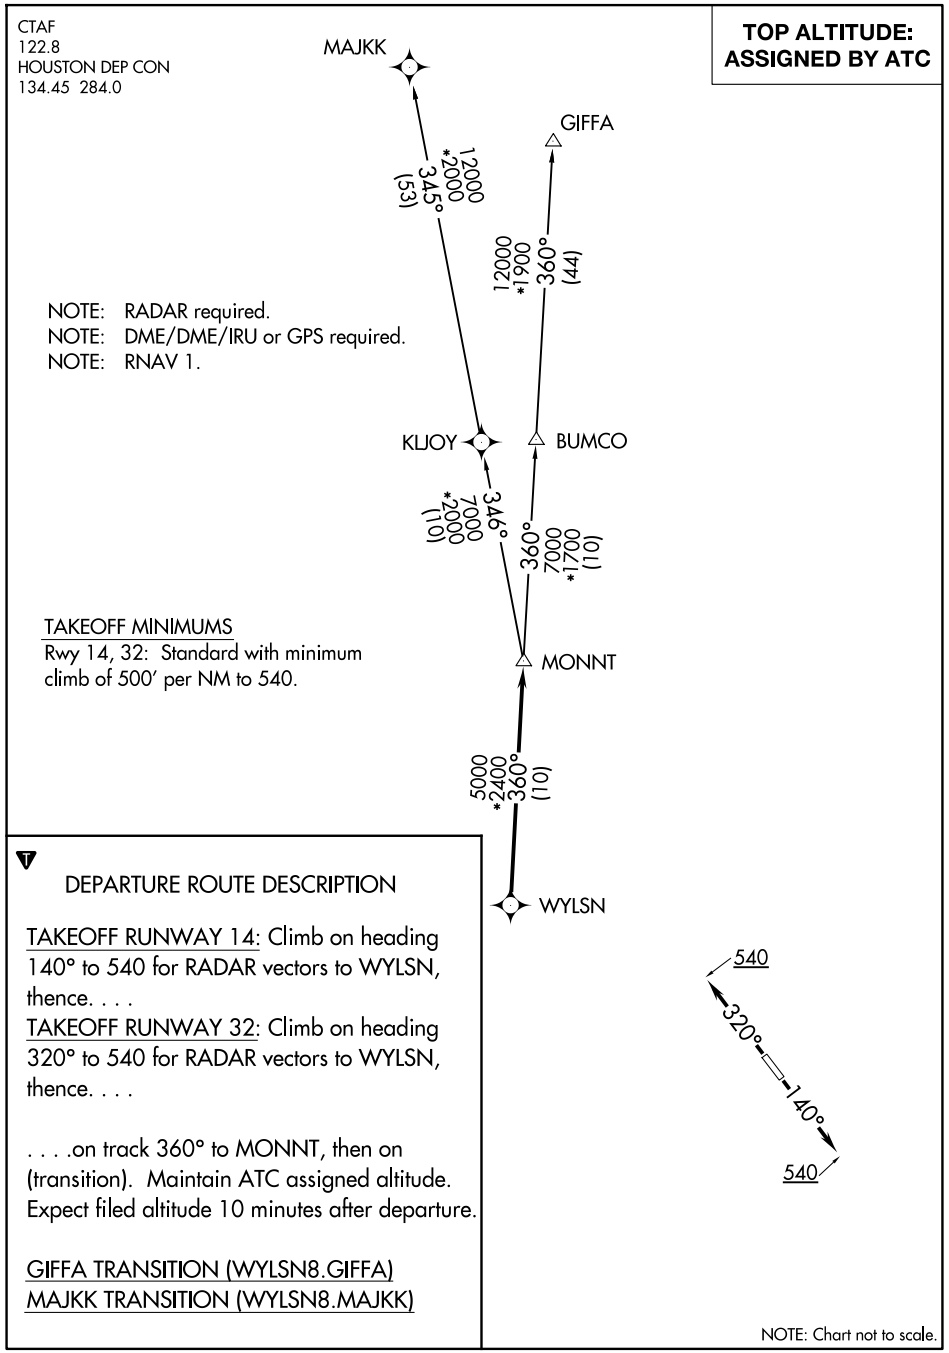
CTAF
122.8
HOUSTON DEP CON
134.45 284.0
TOP ALTITUDE:
ASSIGNED BY ATC
MAJKK
GIFFA
12000
*2000
345°
(53)
12000
*1900
360°
(44)
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
KLJOY
BUMCO
7000
*2000
346°
(10)
360°
7000
*1700
(10)
TAKEOFF MINIMUMS
Rwy 14, 32: Standard with minimum climb of 500' per NM to 540.
MONNT
5000
*2400
360°
(10)
WYLSN
DEPARTURE ROUTE DESCRIPTION
TAKEOFF RUNWAY 14: Climb on heading 140° to 540 for RADAR vectors to WYLSN, thence. . . .
TAKEOFF RUNWAY 32: Climb on heading 320° to 540 for RADAR vectors to WYLSN, thence. . . .
. . . .on track 360° to MONNT, then on (transition). Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.
GIFFA TRANSITION (WYLSN8.GIFFA)
MAJKK TRANSITION (WYLSN8.MAJKK)
540
320°
140°
540
NOTE: Chart not to scale.