



WAAS CH 82620 W24A	APP CRS 240°	Rwy Ldg TDZE Apt Elev	5008 144 144
--	------------------------	-----------------------------	---


RNAV (GPS) Z RWY 24
CLINTON-SAMPSON COUNTY (CTZ)

RNP APCH-GPS. Baro-VNAV NA when using DPL altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 46°C. When local altimeter setting not received, use DPL altimeter setting and increase all DA 45 feet, increase LNAV/VNAV Cats A/B/C visibility 1/8 mile. Rwy 24 helicopter visibility reduction below 3/4 SM NA.	MISSED APPROACH: Climb to 2500 direct WEXES and hold.
---	--


AWOS-3 119.125	FAYETTEVILLE APP CON 133.0 290.25	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

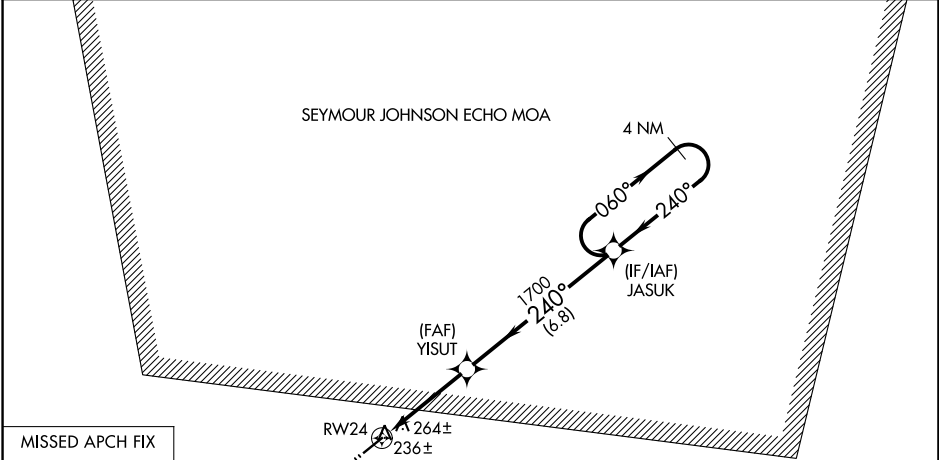

ELEV 144	TDZE 144
-----------------	-----------------

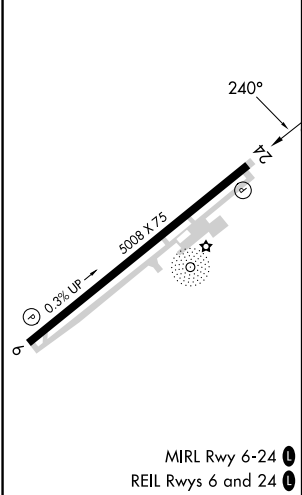

RADAR REQUIRED



2500	WEXES	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).			
		YISUT	JASUK	4 NM Holding Pattern	
		1700	1700	2500	
		3.9 NM	6.8 NM		GP 3.60° TCH 58
CATEGORY	A	B	C	D	
LPV DA	470-1	326 (400-1)		NA	
LNAV/VNAV DA	566-1 1/4	422 (500-1 1/4)		NA	

SE-2, 06 AUG 2026 to 03 SEP 2026

SE-2, 06 AUG 2026 to 03 SEP 2026