

LOC I-BPM	APP CRS	Rwy Ldg	7000
111.9	133°	TDZE	1031
		Apt Elev	1031

ILS or LOC RWY 13

ST CLOUD SKY CENTRAL (STC)


DME required.

For inop ALS when using Little Falls altimeter setting, increase S-ILS-13 all Cats visibility to ¾ SM. When local altimeter setting not received, use Little Falls altimeter setting, increase DA to 1307 feet; increase all MDAs 80 feet and S-LOC 13 visibility Cats C and D ¼ SM, and Circling visibility Cats C and D ¼ SM. For inop ALS, increase S-LOC 13 Cats C and D visibility to 1 ¾ SM. DME from STC VOR/DME. DME use requires simultaneous reception of I-BPM and STC DME. VDP NA when using Little Falls altimeter setting.

MALSR

MISSED APPROACH: Climb to 2500 then climbing left turn to 5000 direct STC VOR/DME and on STC VOR/DME R-312 to SIYON/STC 14.5 DME and hold.

ATIS	MINNEAPOLIS CENTER	ST. CLOUD TOWER ★	GND CON
119.375	121.05 235.775	118.25 (CTAF) 0	123.75

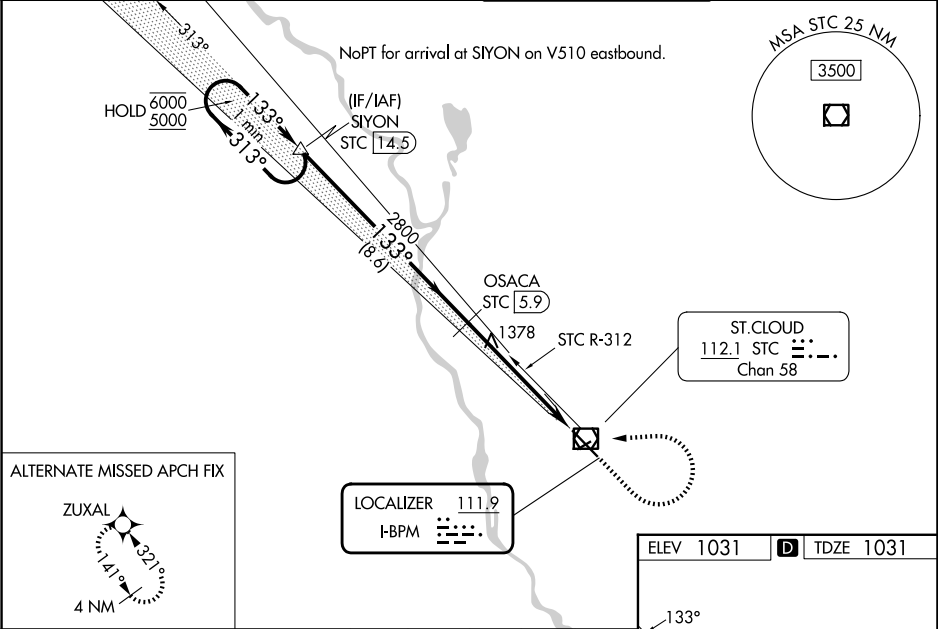

	SIYON	2500	5000	STC	STC R-312	SIYON
	STC 14.5					△
	One Minute Holding Pattern	OSACA				
	6000	STC 5.9				
	5000					
	GS 3.00°	2800				
	TCH 49	2800				
		8.6 NM	3.7 NM	1.8 NM		
CATEGORY	A	B	C	D		
S-ILS 13	1231-½		200 (200-½)			
S-LOC 13	1640-½ 609 (700-½)		1640-1 ¾ 609 (700-1 ¾)			
CIRCLING	1640-1 609 (700-1)		1640-1 ¾ 609 (700-1 ¾)			

