

WAAS

CH **70423**

W35A

APP CRS

352°

Rwy Ldg

4305

TDZE

1616

Apt Elev

1616


RNAV (GPS) RWY 35

CLINTON RGNL (CLK)

⚠ DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). Circling NA to Rwy 13 and 31. When local altimeter setting not received, use Weatherford altimeter setting: Increase DA to 1902 and all visibilities ½ mile; increase all MDA 40 feet and visibility Cat C ¼ mile. Baro-VNAV and VDP NA when using Weatherford altimeter setting.

MISSED APPROACH: Climb to 2400 then climbing left turn to 4000 direct OSUCU and hold.

AWOS-3 119.225	FORT WORTH CENTER 128.4 269.37	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

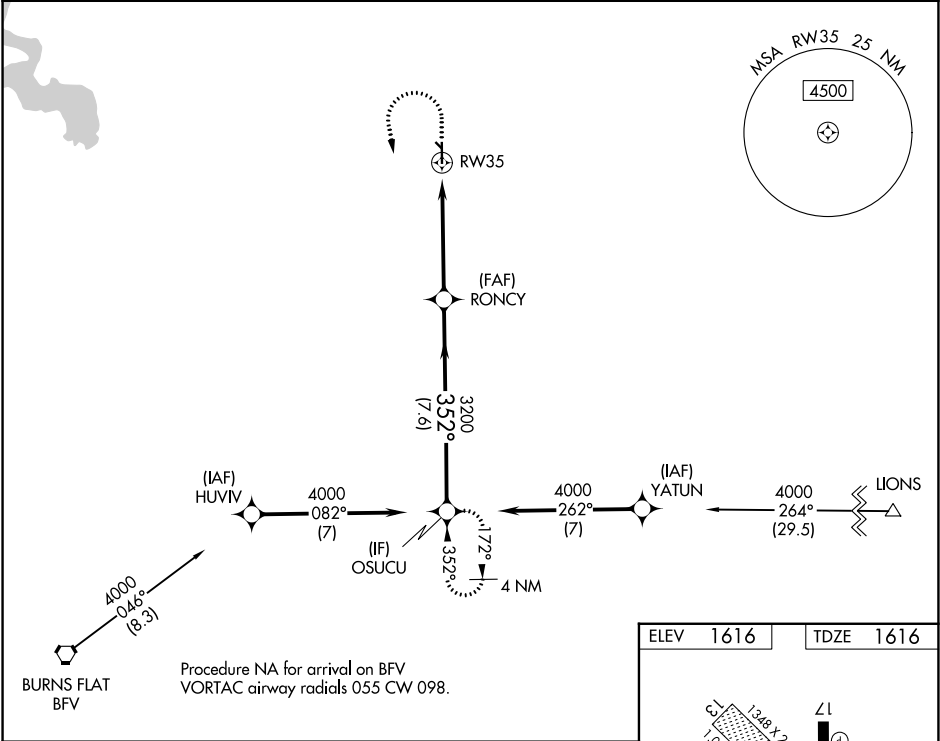

			VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).		
*LNAV only.		*1.3 NM to RW35	RONCY	3200	4000
		1.3 NM	3.6 NM	7.6 NM	GP 3.00° TCH 40
CATEGORY	A	B	C	D	
LPV DA	1866-7/8		250 (300-7/8)	NA	
LNAV/VNAV DA	1870-7/8		254 (300-7/8)	NA	
LNAV MDA	2040-1 424 (500-1)		2040-1 424 (500-1 1/4)	NA	
CIRCLING	2100-1 484 (500-1)	2220-1 604 (700-1)	2320-2 704 (800-2)	NA	

