

WAAS CH 70708 W36A	APP CRS 001°	Rwy Idg 5002 TDZE 239 Apt Elev 239
--	------------------------	---

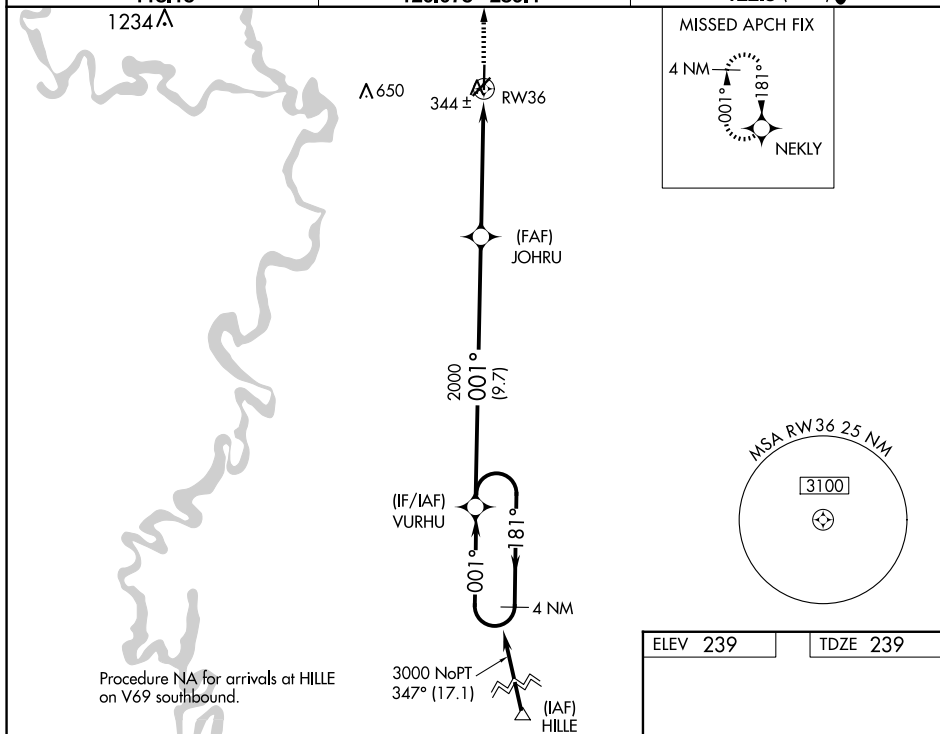
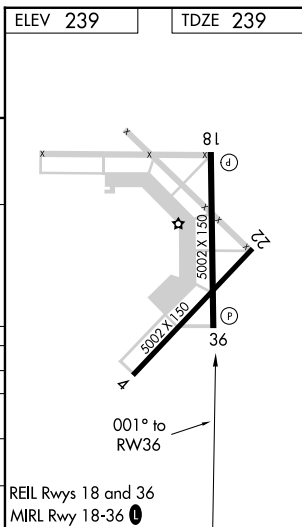
RNAV (GPS) RWY 36
NEWPORT RGNL (M19)

RNP APCH-GPS.

Baro-VNAV NA when using Batesville altimeter setting. For uncomparted Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Batesville altimeter setting; increase LPV DA to 575 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 700 feet and all visibilities ½ SM; increase all MDAs 100 feet and visibility Cats C ¼ SM and D ½ SM. VDP NA when using Batesville altimeter setting.

MISSED APPROACH: Climb to 3000 direct NEKLY and hold.

AWOS-3PT	MEMPHIS CENTER	UNICOM
118.15	120.075 289.4	122.8 (CTAF) 0

[illegible]

RNAV (GPS) RWY 36