

WAAS CH 99600 W36A	APP CRS 002°	Rwy Ldg 8003 TDZE 261 Apt Elev 264
--	------------------------	---

RNAV (GPS) RWY 36

GOLDEN TRIANGLE RGNL (GTR)


RNP APCH.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Columbus AFB altimeter setting: increase LPV DA to 500 feet, LNAV/VNAV DA to 593 feet and LNAV/VNAV visibility 1/8 SM; increase all MDAs 40 feet. Baro-VNAV and VDP NA when using Columbus AFB altimeter setting.

MISSED APPROACH:
Climb to 3000 direct HUYKA and hold.

ATIS 126.375	COLUMBUS APP CON★ 135.6 323.275	GOLDEN TRIANGLE TOWER★ 118.2 (CTAF) 0 298.875	GND CON 135.375 322.475	UNICOM 122.95
------------------------	---	---	-----------------------------------	-------------------------

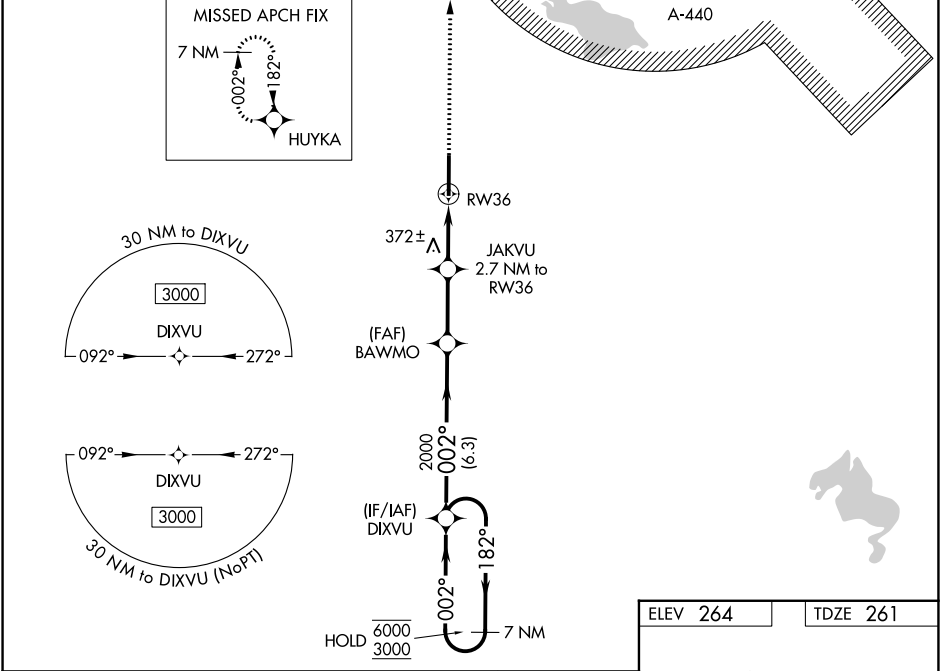

7 NM Holding Pattern

DIXVU

BAWMO

JAKVU 2.7 NM to RW36

*1 NM to RW36

RW36

GP 3.00° TCH 42

6000

3000

182°

002°

002°

2000

*1140

6.3 NM

2.7 NM

1.7 NM

1 NM

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 55).

3000

HUYKA

*LNAV only.

CATEGORY	A	B	C	D	E
LPV DA	461-3/4 200 (200-3/4)				
LNAV/VNAV DA	554-7/8 293 (300-7/8)				
LNAV MDA	640-1	379 (400-1)	640-1 379 (400-1 1/8)		
CIRCLING	760-1	496 (500-1)	960-2 696 (700-2)	960-2 1/4 696 (700-2 1/4)	960-2 1/2 696 (700-2 1/2)

