



⚠

⚠

DME/DME RNP-0.3 NA. Night Landing: Rwy 1 NA. When local altimeter setting not received, use Franklin altimeter setting and increase all DA 67 feet and all MDA 80 feet; increase LPV all Cats visibility ⅛ mile, LNAV Cats C/D visibility ⅜ mile and Circling Cat D visibility ¼ mile. Baro-VNAV NA when using Franklin altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:  
Climb to 3000 direct  
UFEMI and hold, continue  
climb-in-hold to 3000.

|                   |                                    |                                 |
|-------------------|------------------------------------|---------------------------------|
| AWOS-3<br>119.075 | WASHINGTON CENTER<br>123.85 279.65 | UNICOM<br>122.8 (CTAF) <b>0</b> |
|-------------------|------------------------------------|---------------------------------|

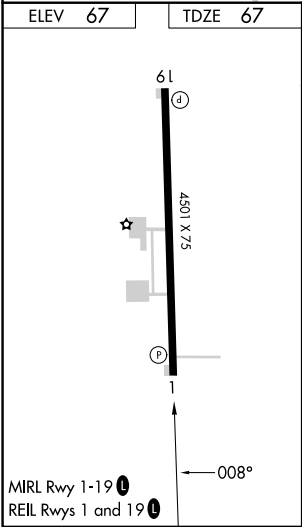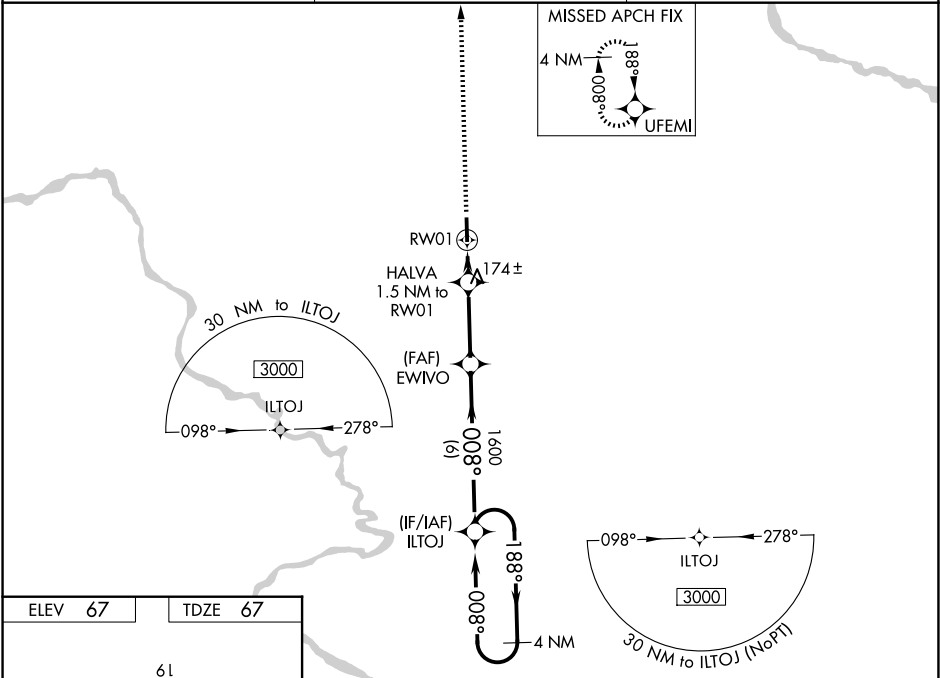

|              |                         |              |                        |                        |
|--------------|-------------------------|--------------|------------------------|------------------------|
| 3000         | UFEMI                   | ILTOJ        | 4 NM Holding Pattern   | 3000                   |
| *LNAV only.  | HALVA<br>1.5 NM to RW01 | EWVO<br>1600 | 188°                   | 008°                   |
| RW01         | 600*                    | 1600         | 008°                   | GP 3.17°<br>TCH 41     |
| 1.5 NM       | 2.9 NM                  | 6 NM         |                        |                        |
| CATEGORY     | A                       | B            | C                      | D                      |
| LPV DA       | 359-1                   | 292 (300-1)  |                        | NA                     |
| LNAV/VNAV DA | 322-1                   | 255 (300-1)  |                        | NA                     |
| LNAV MDA     | 440-1                   | 373 (400-1)  |                        |                        |
| CIRCLING     | 580-1                   | 513 (600-1)  | 580-1½<br>513 (600-1½) | 820-2½<br>753 (800-2½) |