


LONE STAR DEP CON
125.125 353.95 (Rwys 17C/R)
125.125 353.95 (Rwys 18L/R)
126.475 363.15 (Rwys 36L/R)
118.55 290.35 (Rwys 35L/C)
D-ATIS DEP
135.925
CLNC DEL
128.25
CPDLC
GND CON
121.65 121.8 (EAST)
121.85 (WEST)
DFW TOWER
126.55 127.5 (EAST)
124.15 134.9 (WEST)

RNAV 1- DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE:
RWYS 13L/R, 17L/C/R,
18L/R, 35L/C/R, 36L/R: 10000
RWYS 31L/R: 5000

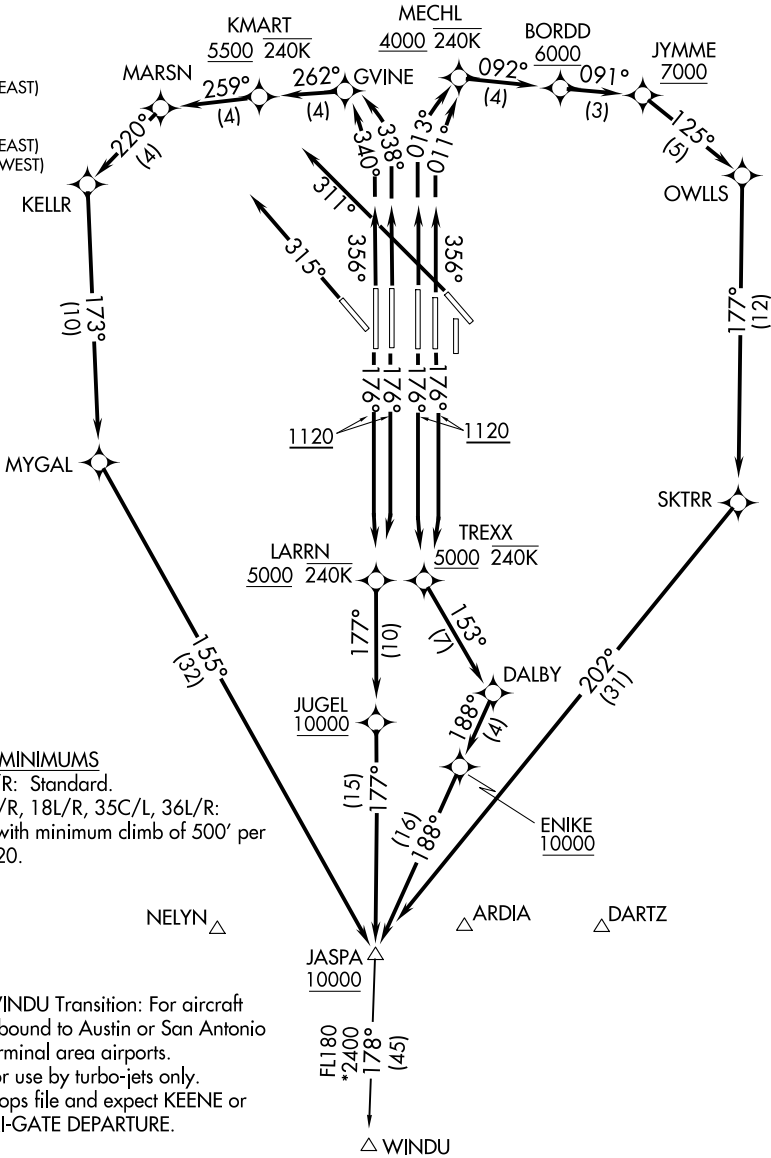

TAKEOFF MINIMUMS
Rwys 31L/R: Standard.
Rwys 17C/R, 18L/R, 35C/L, 36L/R:
Standard with minimum climb of 500' per
NM to 1120.

NOTE: WINDU Transition: For aircraft
inbound to Austin or San Antonio
terminal area airports.
NOTE: For use by turbo-jets only.
NOTE: Props file and expect KEENE or
TRI-GATE DEPARTURE.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.