


RNP APCH.		MISSED APPROACH: Climb to 3400 direct KANGE and hold.	
Circling NA to Rwy 17 and 35. Rwy 18 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.			
AWOS-3PT 134.975	RAZORBACK APP CON ★ 121.0 (WEST) 244.575	CLNC DEL 121.05 263.125	UNICOM 122.975 (CTAF) U



3400	KANGE				
LNAV only. MANBE 1.6 NM to RW18 RW18 OHGUP 3000 ZATEB 4 NM Holding Pattern 6000 3200 GP 3.00° TCH 45 1900 3000 1.6 NM 3.6 NM 5.8 NM					
CATEGORY	A	B	C	D	
LPV DA	1548-1		250 (300-1)		
LNAV/VNAV DA	1688-1½		390 (400-1½)		
LNAV MDA	1700-1	402 (500-1)	1700-1½	402 (500-1½)	
CIRCLING	1780-1	482 (500-1)	1920-1¾ 622 (700-1¾)	1940-2 642 (700-2)	

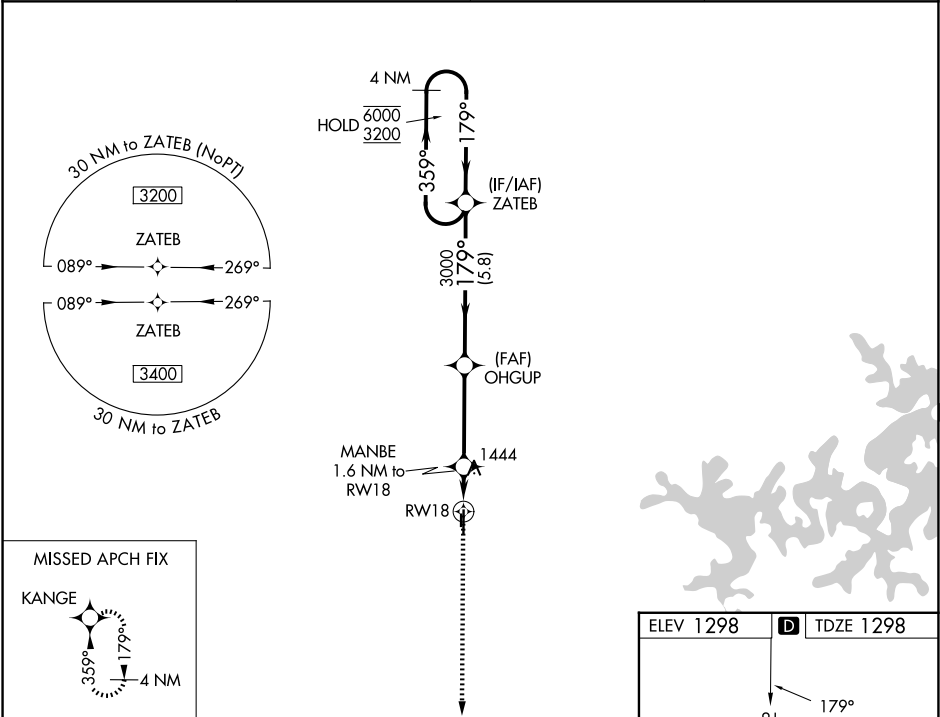