


WAAS CH 97614 W27A	APP CRS 275°	Rwy Ldg TDZE 763 Apt Elev 763
--	------------------------	---

RNAV (GPS) RWY 27

PUTNAM COUNTY (OWX)

RNP APCH. ▼ ▲ NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C . Baro-VNAV and VDP NA when using Findlay altimeter setting. Rwy 27 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Findlay altimeter setting and increase all DAs/MDAs 40 feet.		MISSED APPROACH: Climb to 3000 direct WIFES and hold.
AWOS-3PT 120.525	TOLEDO APP CON 120.8 317.55	UNICOM 122.7 (CTAF) 0

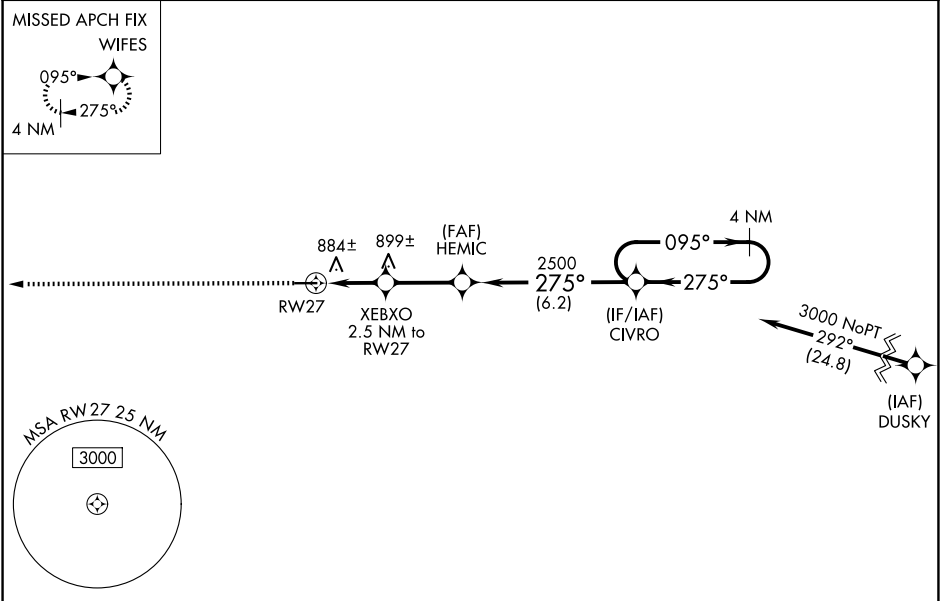

ELEV 763

TDZE 763

3000

WIFES

*LNAV only.

XEBXO
2.5 NM to
RW27

HEMIC

CIVRO

4 NM
Holding Pattern

275°

275°

095°

3000

GP 3.00°
TCH 44

1.0

1.5 NM

2.7 NM

6.2 NM

4502 X 75

799±

275°

27

REIL Rwy 9 and 27

MIRL Rwy 9-27

CATEGORY	A	B	C	D
LPV DA	1048-1	285 (300-1)	NA	
LNAV/ VNAV DA	1185-1½	422 (500-1½)	NA	
LNAV MDA	1140-1	377 (400-1)	NA	
CIRCLING	1200-1 437 (500-1)	1220-1 457 (500-1)	NA	