

WAAS CH 63138 W13A	APP CRS 136°	Rwy Ldg 3401 TDZE 754 Apt Elev 754
--	------------------------	---

RNAV (GPS) RWY 13


WASHINGTON MUNI (AWG)

RNP APCH.

- ⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F).
⚠ Baro-VNAV and VDP NA when using Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting: increase LPV DA to 1066 feet, LNAV/VNAV DA to 1282 feet; increase all MDAs 80 feet and visibility LNAV and Circling Cat C ¼ SM.

MISSED APPROACH:
Climb to 3000 direct
KILKE and hold.

AWOS-3 127.825	CHICAGO CENTER 135.6 370.95	UNICOM 122.7 (CTAF) ①
--------------------------	---------------------------------------	---------------------------------

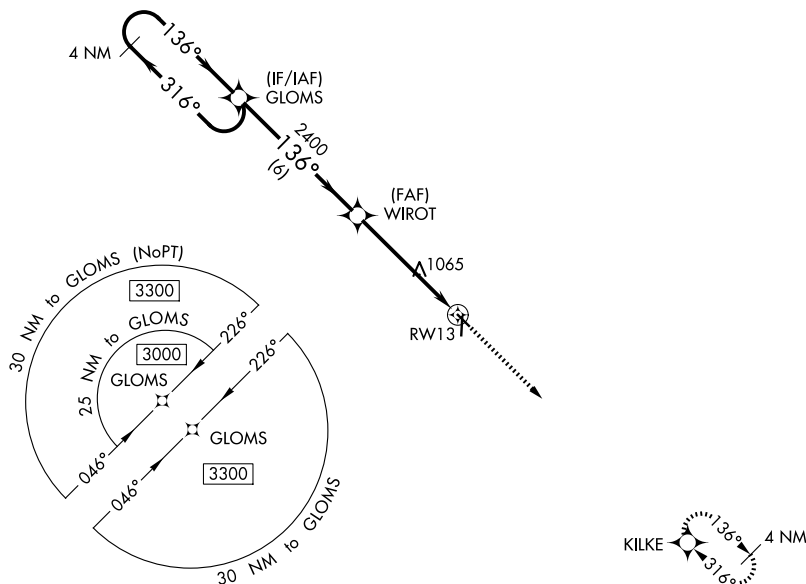

4 NM Holding Pattern GLOMS 3000 ← 316° 136° → GP 3.00° TCH 37 WIROT 2400 *1.7 NM to RW13 RW13 3000 KILKE *LNAV only				
6 NM 3.4 NM 1.7 NM				
CATEGORY	A	B	C	D
LPV DA	1004-1 250 (300-1)			NA
LNAV/VNAV DA	1220-1½ 466 (500-1½)			NA
LNAV MDA	1320-1 566 (600-1)		1320-1½ 566 (600-1½)	NA
CIRCLING	1320-1 566 (600-1)		1500-2¼ 746 (800-2¼)	NA

ELEV 754

TDZE 754

MIRL Rwy 13-31 and 18-36

REIL Rwy 13, 31, 18 and 36