

WAAS CH 90416 W36A	APP CRS 004°	Rwy Ldg 4000 TDZE 752 Apt Elev 754
--	------------------------	---

RNAV (GPS) RWY 36

WASHINGTON MUNI (AWG)

RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting.

▲ increase LPV DA to 1064 feet and LNAV/VNAV DA to 1072 feet; increase all MDAs 80 feet and visibility LNAV and Circling Cat C ¼ SM.

MISSED APPROACH: Climb to 3000
direct GANAD and hold.

AWOS-3

127.825



CHICAGO CENTER

135.6 370.95


UN|COM

122.7 (CTAF) L

MISSED APCH FIX

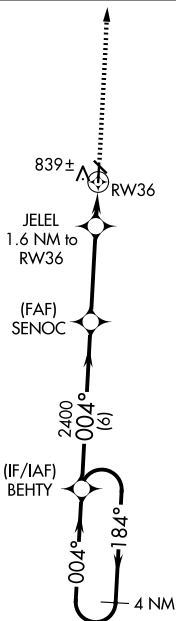

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 35).

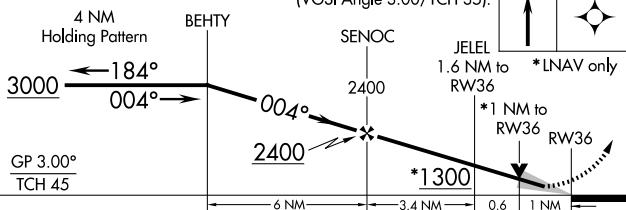


CATEGORY	A	B	C	D
LPV DA	1002-1 250 (300-1)			NA
LNAV/ VNAV DA	1010-1 258 (300-1)			NA
LNAV MDA	1100-1 348 (400-1)			NA
CIRCLING	1200-1 446 (500-1)	1260-1 506 (600-1)	1500-2¼ 746 (800-2¼)	NA

ELEV 754		TDZE 752
----------	--	----------

MIRL Rwy 13-31 and 18-36 **L**

REIL Rwy 18, 13, 31 and 36 L

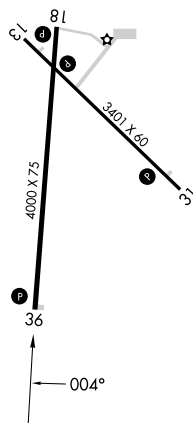

RNAV (GPS) RWY 36