


WAAS CH 50333 W01A	APP CRS 013°	Rwy Ldg TDZE 857 Apt Elev 858
--	------------------------	---

RNAV (GPS) RWY 1

KEWANEE MUNI (EZI)

RNP APCH - GPS.	▼ ▲ NA Baro-VNAV NA. Use GBG altimeter setting; when not received, use MLI altimeter setting and increase LPV DA to 1212 feet; increase LNAV/VNAV DA to 1242 feet and all visibilities ½ SM. Increase all MDAs 40 feet; and Circling visibility Cat C ¼ SM.	MISSED APPROACH: Climb to 2400 direct YABYU and hold.
-----------------	---	--

GBG AWOS-3 118.975	QUAD CITY APP CON★ 133.275 257.8	UNICOM 122.8 (CTAF) 0
------------------------------	--	---------------------------------

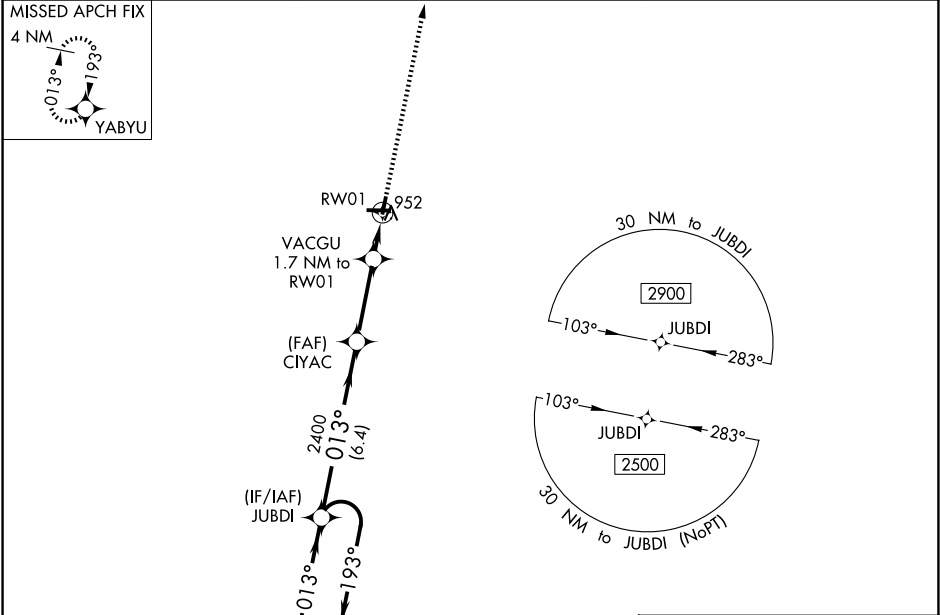

4 NM Holding Pattern		JUBDI	2400	YABYU
6000 ← 193°		CIYAC	VACGU	RW01
2500 → 013°		2400	1.7 NM to RW01	
GP 3.00°		2400	1420	
TCH 40		6.4 NM	3 NM	1.7 NM
CATEGORY	A	B	C	D
LPV DA	1182-1		325 (400-1)	NA
LNAV/VNAV DA	1212-1		355 (400-1)	NA
LNAV MDA	1300-1	443 (500-1)	1300-1⅜ 443 (500-1⅜)	NA
CIRCLING	1340-1 482 (500-1)	1520-1 662 (700-1)	1520-1¾ 662 (700-1¾)	NA