

VORTAC FBC

108.2

Chan 19

APP CRS

104°

Rwy Idg

TDZE

Apt Elev

N/A

N/A

830

VOR-A

WYANDOT COUNTY (56D)

Procedure NA at night. When local altimeter setting not received, use Marion altimeter setting: increase all MDAs 40 feet and visibility Cat C/D ¼ SM.

MISSED APPROACH: Climbing left turn to 2500 on FBC VORTAC R-104 to RITRO INT/15 DME and hold.

FDY ASOS


132.85

CLEVELAND APP CON ★

128.35 360.65

UNICOM

123.05 (CTAF) 0

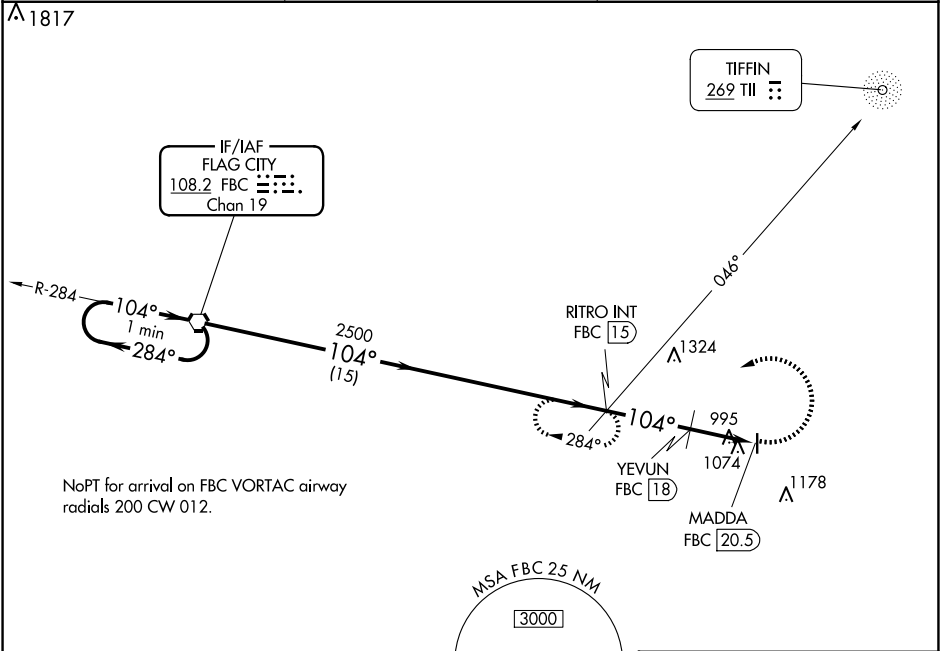

ADF or DME REQUIRED

ELEV 830

81

3997 X 75

36

104°

One Minute Holding Pattern

2500

284°

104°

FBC VORTAC

104°

2500

RITRO INT
FBC 15

1520

YEVUN
FBC 18

MADDA
FBC 20.5

1520

2500

FBC R-104

RITRO INT

15 NM

3 NM

2.5

CATEGORY	A	B	C	D
CIRCLING	1520-1 690 (700-1)	1520-1¼ 690 (700-1¼)	1540-2 710 (800-2)	1540-2¼ 710 (800-2¼)

YEVUN FIX MINIMUMS (DME REQUIRED)

CIRCLING	1420-1 590 (600-1)	1440-1 610 (700-1)	1540-2 710 (800-2)	1540-2¼ 710 (800-2¼)
----------	-----------------------	-----------------------	-----------------------	-------------------------

LRL Rwy 18-36 0

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50