

WAAS CH 99605 W07A	APP CRS 071°	Rwy Ldg TDZE Apt Elev	5008 6 7
--	------------------------	-----------------------------	-------------------------------------

RNAV (GPS) RWY 7

THE FLORIDA KEYS MARATHON INTL (MTH)


RNP APCH-GPS.

▼

Rwy 7 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 12°C or above 54°C. Baro-VNAV NA when using EYW altimeter setting. Procedure NA at night. When local altimeter setting not received, use EYW altimeter setting: increase LPV DA to 482 feet and all visibilities ¼ SM, LNAV/VNAV DA to 474 feet and all visibilities ⅜ SM, increase all MDAs 100 feet and LNAV Cat C/D visibility ¼ SM and Circling Cat C/D visibility ½ SM.

MISSED APPROACH: Climb to 2000 direct LOGEY and hold.

ASOS 135.525	MIAMI CENTER 133.5 306.9	UNICOM 122.975 (CTAF) 0
------------------------	------------------------------------	-----------------------------------

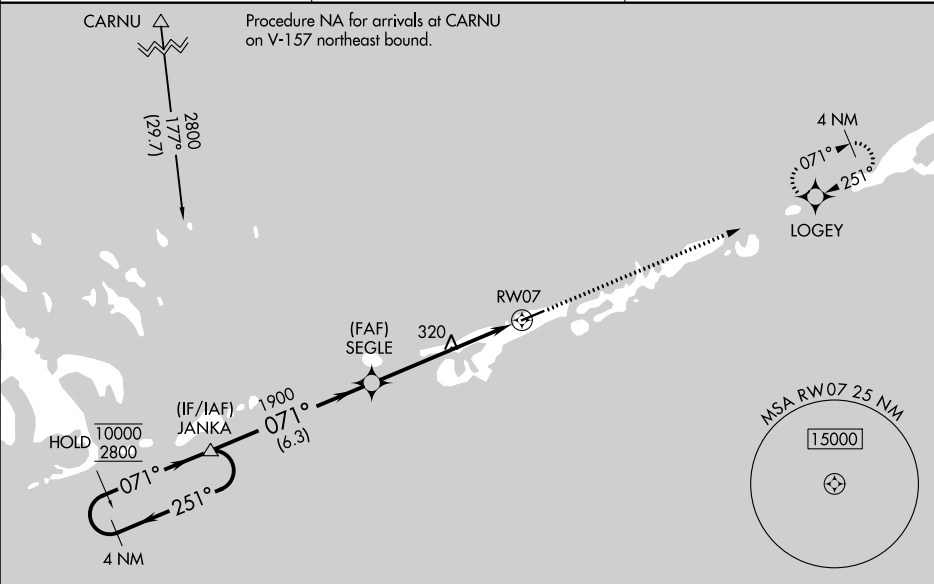

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).

JANKA

SEGLE

RW07

2000 LOGEY

10000 2800

GP 3.00° TCH 40

251° 071°

071°

1900

6.3 NM 5.8 NM

5008 X 100

62

REIL Rwy 7 0

MIRL Rwy 7-25 0

CATEGORY	A	B	C	D
LPV DA	389-1⅛ 383 (400-1⅛)			
LNAV/VNAV DA	381-1 375 (400-1)			
LNAV MDA	600-1 594 (600-1)		600-1¾ 594 (600-1¾)	
CIRCLING	600-1 593 (600-1)		620-1¾ 660-2 613 (700-1¾) 653 (700-2)	