

WAAS CH 93804 W18A	APP CRS 176°	Rwy Ldg TDZE Apt Elev	5201 1277 1277
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18

WELLINGTON MUNI (E/GT)


RNP APCH - GPS.

⚠

Baro-VNAV and VDP NA when using ICT altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use ICT altimeter setting: increase LPV DA to 1530 feet; increase LNAV/VNAV DA to 1775 feet; increase all MDAs 60 feet and LNAV Cats C/D visibility 1⁄8 SM and Circling Cat C/D visibility 1⁄4 SM.

MISSED APPROACH: Climb to 3000 direct GOLMN and hold.

AWOS-3P 118.875	WICHITA APP CON 134.85	UNICOM 122.8 (CTAF) 0
---------------------------	----------------------------------	---------------------------------

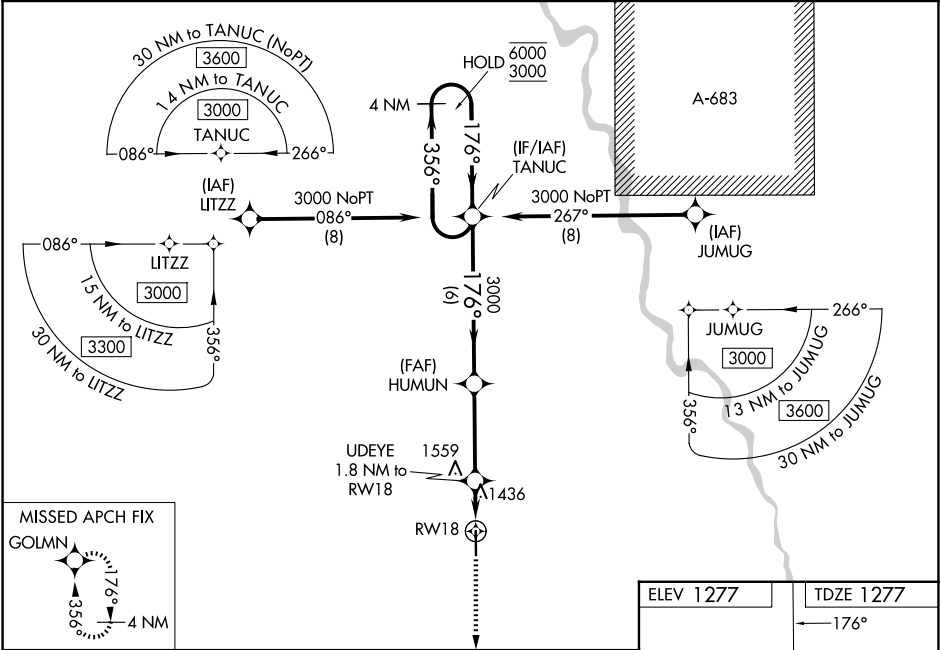

4 NM Holding Pattern		TANUC	HUMUN	UDEYE 1.8 NM to RW18	3000 GOLMN
6000 3000	← 356° 176° →	176° → 3000	3000	1.2 NM to RW18	3000
GP 3.00° TCH 42		1900		RW18	
		6 NM	3.5 NM	0.6	1.2 NM
CATEGORY	A	B	C	D	
LPV DA	1477-1 200 (200-1)				
LNAV/VNAV DA	1722-1 3/8 445 (500-1 3/8)				
LNAV MDA	1700-1 423 (500-1)	1700-1 1/4 423 (500-1 1/4)			
CIRCLING	1760-1 483 (500-1)	2040-2 1/4 763 (800-2 1/4)		2140-2 3/4 863 (900-2 3/4)	
ELEV 1277		TDZE 1277			
		176°			
		81			
		001 X 1025			
		36			
		HIRL Rwy 18-36 0			
		REIL Rwy 18 and 36 0			