

WAAS CH 63135 W32A	APP CRS 323°	Rwy Ldg TDZE 1800 Apt Elev 1800
--	------------------------	---

RNAV (GPS) RWY 32

SMITH CENTER MUNI (K82)


RNP APCH - GPS.

⚠


Baro-VNAV and VDP NA when using CNK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use CNK altimeter setting: increase LPV DA to 2174 feet; increase LNAV/VNAV DA to 2224 feet and all visibilities ¼ SM; increase all MDAs 180 feet, and Circling all visibilities ½ SM.

MISSED APPROACH: Climb to 3900 direct LAYIP and hold.

AWOS-3PT 118.45	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------------

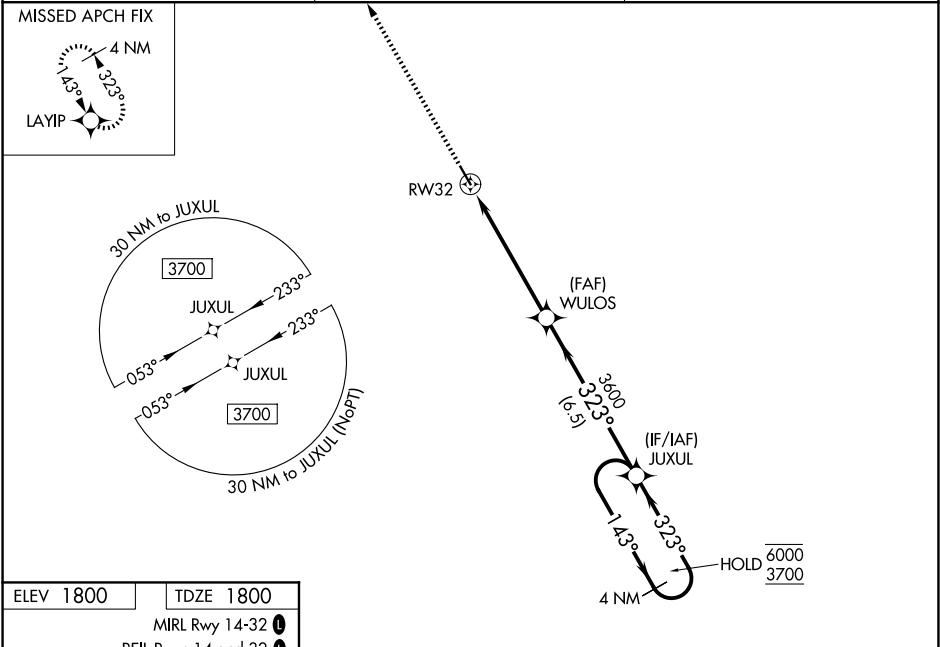

ELEV 1800	TDZE 1800
MIRL Rwy 14-32	REIL Rwys 14 and 32

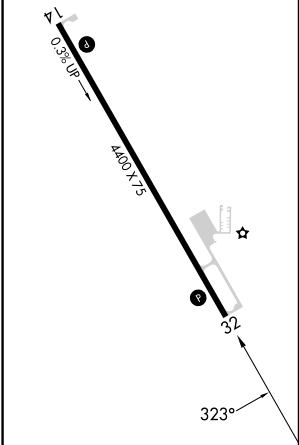

3900		LAYIP		JUXUL		4 NM Holding Pattern	
							
		1.4 NM to RW32		WULOS 3600		143° → 6000 ← 323° 3700	
						GP 3.00° TCH 40	
1.4 NM		4.1 NM		6.5 NM			
CATEGORY		A	B	C	D		
LPV DA		2000-1	200 (200-1)		NA		
LNAV/ VNAV	DA	2050-1	250 (300-1)		NA		
LNAV MDA		2300-1	500 (500-1)		NA		
CIRCLING		2480-1 680 (700-1)	2580-1 780 (800-1)		NA		

NC-2, 06 AUG 2026 to 03 SEP 2026

NC-2, 06 AUG 2026 to 03 SEP 2026