WAAS	APP CRS	Rwy Ldg	4100
CH 97734	357°	TDZE	1151
W36A		Apt Elev	1153

RNAV (GPS) RWY 36

ABILENE MUNI (K78)

RNP APCH - GPS.

T NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using SLN altimeter setting. When local altimeter setting not received, use SLN altimeter setting: increase LPV DA to 1468 feet; increase LNAV/VNAV DA to 1667 feet; increase all MDAs 80 feet and LNAV visibility Cat C ⅛ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3400 direct FINEB and hold.

AWOS-3P	MARSHALL AAF GCA★	UNICOM
124.125	121.25 269.05	122.8 (CTAF) L

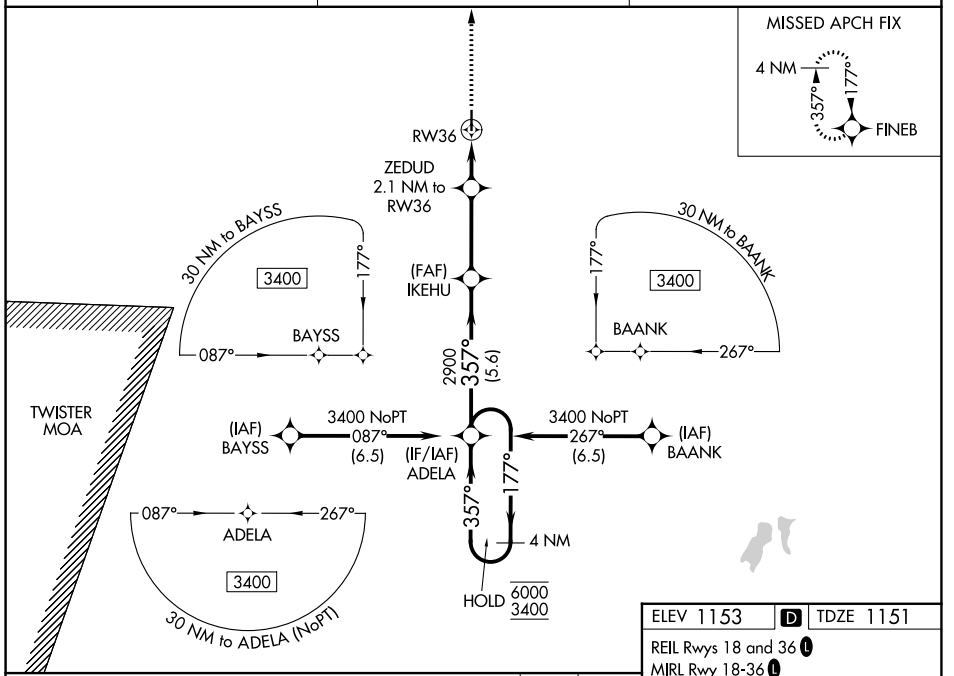

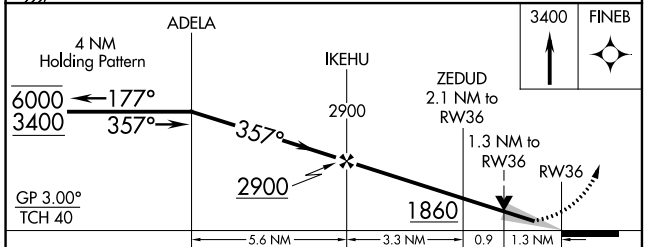

CATEGORY	A	B	C	D
LPV DA	1401-1 250 (300-1)			NA
LNAV/VNAV DA	1600-1⅜ 449 (500-1⅜)			NA
LNAV MDA	1600-1 449 (500-1)		1600-1⅜ 449 (500-1⅜)	NA
CIRCLING	1680-1 527 (600-1)		1900-2¼ 747 (800-2¼)	NA

ELEV 1153 D TDZE 1151

REIL Rwys 18 and 36 L

MIRL Rwy 18-36 L

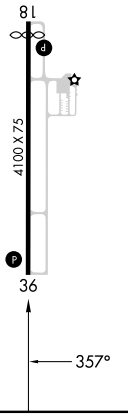

NC-2, 06 AUG 2026 to 03 SEP 2026
NC-2, 06 AUG 2026 to 03 SEP 2026