

APP CRS
060°

Rwy Ldg
TDZE
1215

Apt Elev
1215

RNAV (GPS) RWY 6

MARSHALL COUNTY (MPG)


RNP APCH

▼

Rwy 6 helicopter visibility reduction below ¾ SM NA. VDP NA when using Wheeling altimeter setting. When local altimeter setting not received, use Wheeling altimeter setting: increase all MDA 60 feet and visibility LNAV Cat C ½ SM and Circling Cat C ¼ SM.

MISSED APPROACH: Climb to 3100 direct EWBUF and hold.

AWOS-3 119.05	CLEVELAND CENTER 126.95 239.30	UNICOM 122.7 (CTAF) ①
-------------------------	--	---------------------------------

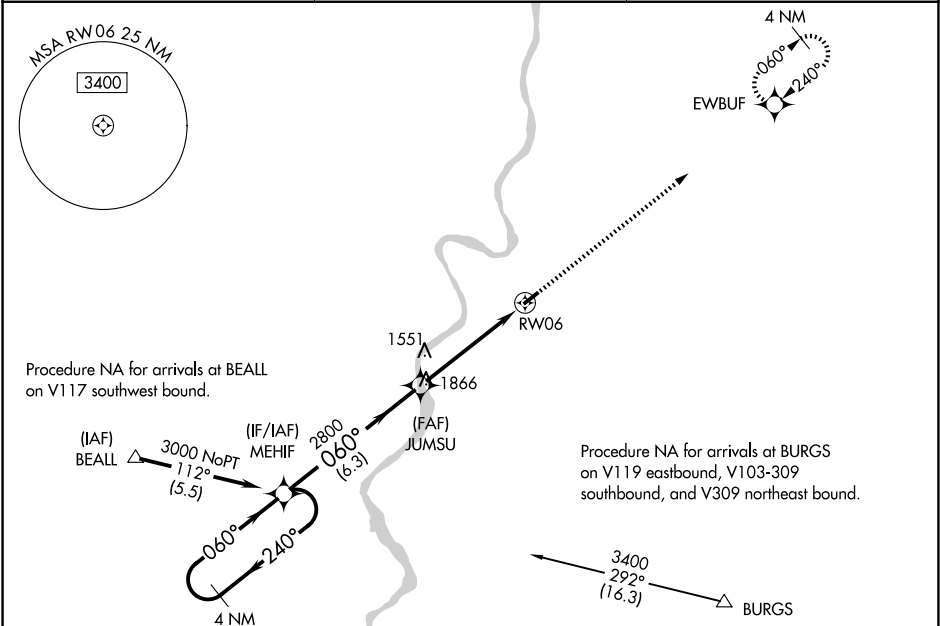

ELEV 1215

TDZE 1215

4 NM Holding Pattern

Visual Segment - Obstacles.

3100 EWBUF

MEHIF

JUMSU

3000 240° 060°

2800

1.5 NM to RW06

RW06

6.3 NM 3.3 NM 1.5 NM

CATEGORY	A	B	C	D
LNAV MDA	1860-1	645 (700-1)	1860-1 ⅞ 645 (700-1 ⅞)	NA
CIRCLING	1860-1	645 (700-1)	1940-2 725 (800-2)	NA

MIRL Rwy 6-24 ①

3301 X 60 0.6% UP

060°