
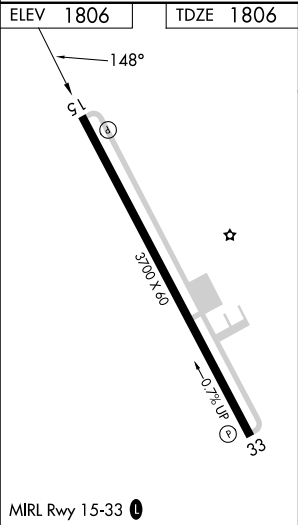


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Norfolk altimeter setting and increase all DA 106 feet, all MDA 120 feet, and increase LPV and LNAV/VNAV visibility ¼ mile all Cats. Baro-VNAV and VDP NA when using Norfolk altimeter setting.

MISSED APPROACH: Climb to 4300 direct AMIVY and hold.

AWOS-3 118.575	MINNEAPOLIS CENTER 128.0 257.95	CTAF 122.9 0
-------------------	------------------------------------	-----------------

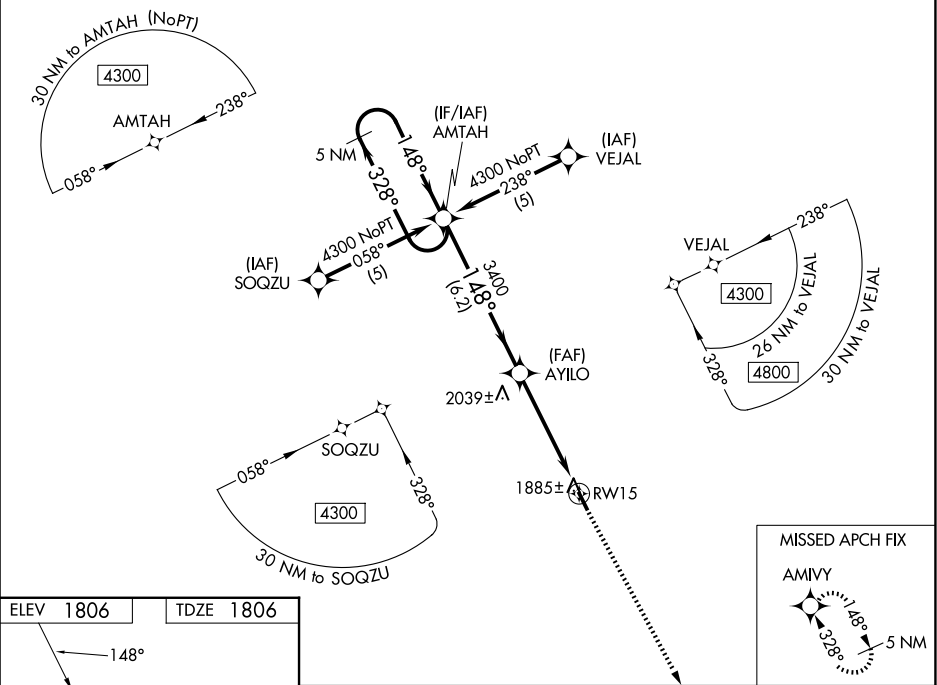

5 NM Holding Pattern ←328° 4300 →148° GP 3.00° TCH 40				AMTAH AYILO 3400 6.2 NM 3.9 NM 0.9		4300 AMIVY *0.9 NM to RW15 *LNAV only. RW15	
CATEGORY	A	B	C	D			
LPV DA	2130-1¼	324 (400-1¼)	NA				
LNAV/VNAV DA	2269-1¾	463 (500-1¾)	NA				
LNAV MDA	2140-1	334 (400-1)	NA				
CIRCLING	2360-1 554 (600-1)	2420-1 614 (700-1)	NA				