

WAAS

CH **53607**

W31A

APP CRS

308°

Rwy Ldg

3901

TDZE

933

Apt Elev

933

RNAV (GPS) RWY 31

CASSELTON ROBERT MILLER RGNL (5N8)

RNP APCH - GPS.


▼

NA

Use FAR altimeter setting; when not received, use KJL altimeter setting; increase LPV DA to 1237 feet; increase LNAV/VNAV DA to 1381 feet; increase all MDAs 20 feet.
Baro-VNAV NA.

MISSED APPROACH: Climb to 3000 direct WUSCO and hold.

FAR ASOS 124.5 379.2	FARGO APP CON 120.4 377.15	UNICOM 122.8 (CTAF) 1
--------------------------------	--------------------------------------	---------------------------------

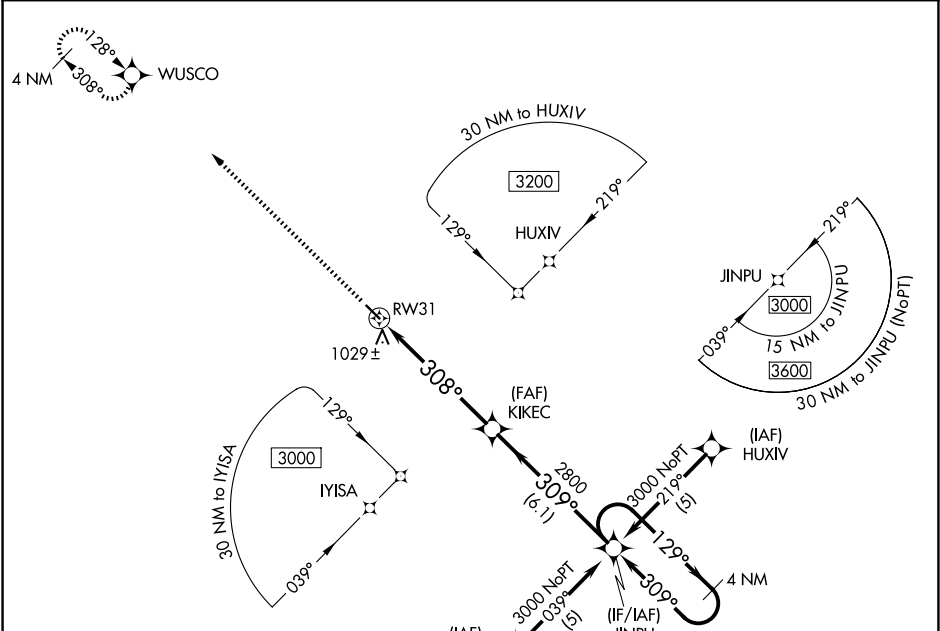

ELEV 933

TDZE 933

1

3

5

7

9

11

13

15

17

19

21

23

25

27

29

31

3001 X 75

308°

3000

WUSCO

VGSI and descent angles not coincident
(VGSI Angle 3.00/TCH 22).

4 NM Holding Pattern

JINPU

KIKEC

RW31

308°

309°

2800

5.7 NM

6.1 NM

GP 3.00°
TCH 40

CATEGORY	A	B	C	D
LPV DA	1226-1	293 (300-1)		NA
LNAV/VNAV DA	1370-1½	437 (500-1½)		NA
LNAV MDA	1420-1	487 (500-1)	1420-1¾ 487 (500-1¾)	NA
CIRCLING	1480-1 547 (600-1)	1520-1 587 (600-1)	1620-2 687 (700-2)	NA

REIL Rwy 31 1

MIRL Rwy 13-31 1