

APP CRS	Rwy Ldg	3600
292°	TDZE	1607
	Apt Elev	1607

RNAV (GPS) RWY 29
HARVEY MUNI (5H4)


HARVEY MUNI (5H4)

RNP APCH - GPS.

V	Circling Rwy 11 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV
A NA	NA below -18°C (0°F) or above 54°C (130°F). Baro-VNAV NA when using DVL altimeter setting. When local altimeter setting not received, use DVL altimeter setting: increase LNAV/VNAV DA to 2230 feet and all visibilities $\frac{3}{8}$ SM; increase all MDAs 140 feet and LNAV visibility Cat C $\frac{3}{8}$ SM and Circling visibility Cat C $\frac{1}{2}$ SM.

MISSED APPROACH:
Climb to 3400 direct
NUTFO and hold.

AWOS-3 118.825	MINNEAPOLIS CENTER 135.25 256.7	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

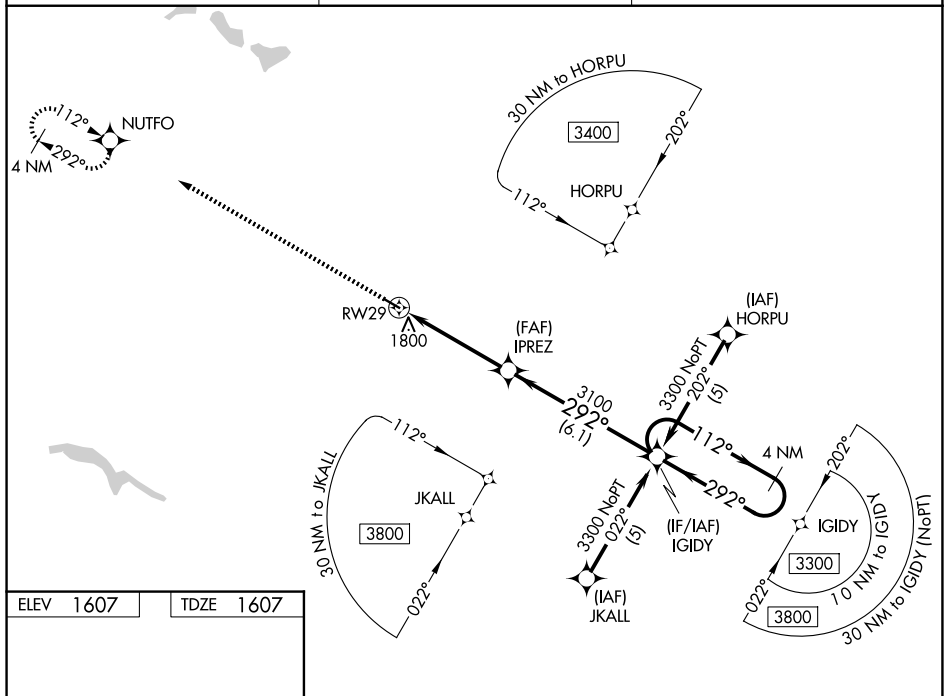

3400
NUTFO
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 27).
IPREZ
3100
IGDY
4 NM Holding Pattern
112°
292°
3300
GP 3.00°
TCH 40°
4.5 NM
6.1 NM
CATEGORY
A
B
C
D
LNAV/VNAV DA
2100-1 3/8
493 (500-1 3/8)
NA
LNAV MDA
2100-1
493 (500-1)
2100-1 3/8
493 (500-1 3/8)
NA
CIRCLING
2120-1
513 (600-1)
2300-2
693 (700-2)
NA