


WAAS CH 69318 W30A	APP CRS 296°	Rwy Ldg TDZE Apt Elev	5650 2131 2135	RNAV (GPS) RWY 30 WATFORD CITY MUNI (S25)
--	------------------------	-----------------------------	---	---

RNP APCH - GPS.	⚠ VDP NA when using Williston altimeter setting. When local altimeter setting not received, use Williston Basin Int altimeter setting: increase LPV DA to 2488 feet; all visibility ¼ SM. Increase all MDAs 120 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ½ SM.	MISSED APPROACH: Climb to 4500 direct GERHE and hold.
-----------------	--	---

AWOS-3PT 118.125	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

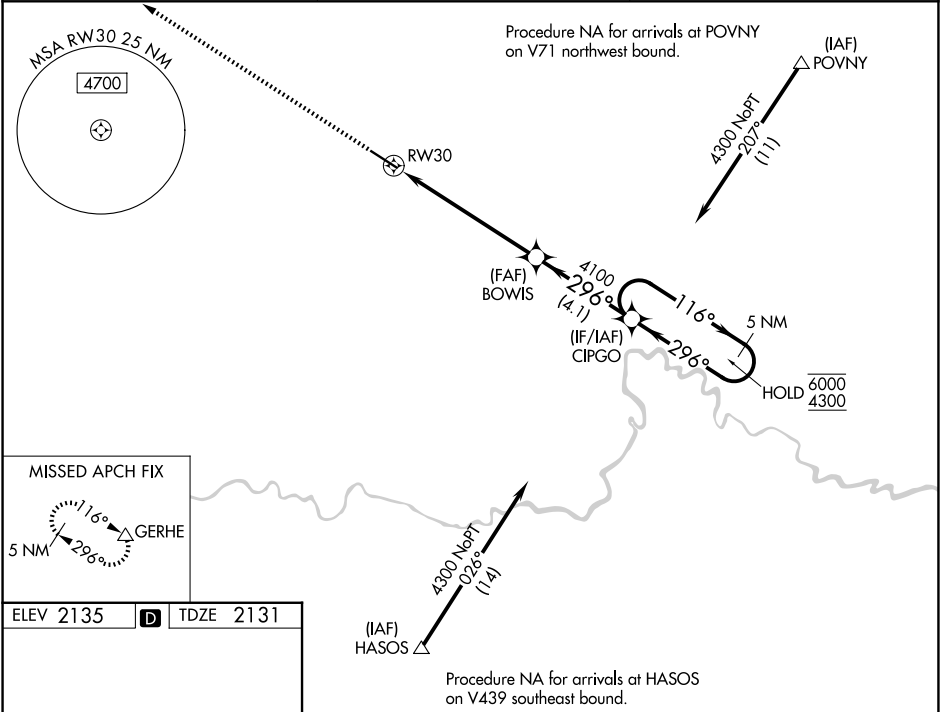

MRL Rwy 12-30

4500	GERHE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).		5 NM Holding Pattern	
↑	△	BOWIS	CIPGO	116° → 6000	← 296° 4300
1.6 NM to RW30		4100	296°	4100	
RW30		1.6	4.5 NM	4.1 NM	
CATEGORY	A	B	C	D	
LPV DA	2381-3/4 250 (300-3/4)				
LNAV MDA	2680-1	549 (600-1)	2680-1 1/8	549 (600-1 1/8)	
CIRCLING	2700-1 565 (600-1)	2760-1 625 (700-1)	2760-1 3/4 625 (700-1 3/4)	2960-2 3/4 825 (900-2 3/4)	