



WAAS CH 58138 W15A	APP CRS 148°	Rwy Ldg TDZE 1067 Apt Elev 1068
--	------------------------	---

RNAV (GPS) RWY 15

ST JAMES MUNI (JYG)

RNP APCH - GPS.	▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using ULM altimeter setting. When local altimeter not received, use ULM altimeter setting; increase LPV DA to 1372 feet; increase LNAV/VNAV DA to 1530 feet; increase all MDAs 60 feet and all visibilities ¼ SM.	MISSED APPROACH: Climb to 3200 direct PUGJU and hold.
-----------------	---	--

AWOS-3PT 123.7	MINNEAPOLIS CENTER 127.75 257.7	GCO 121.725	CTAF 122.9 0
--------------------------	---	-----------------------	------------------------

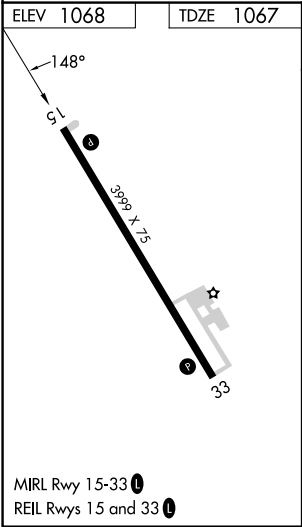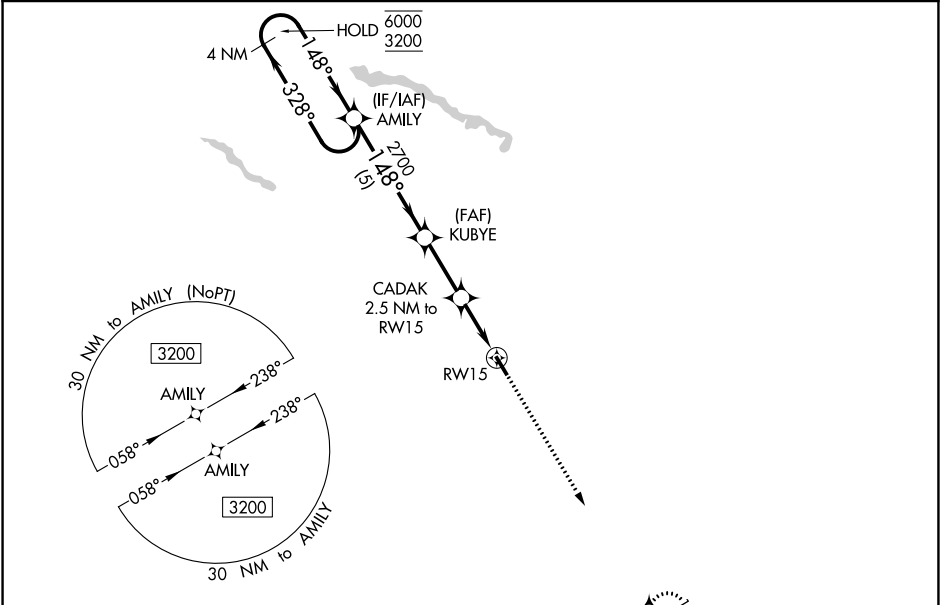

VGSI and RNAV glidepath not coincident (VGSI Angle 2.83/TCH 40).				3200	PUGJU
4 NM Holding Pattern				↑	✦
6000 ← 328° 3200 → 148°					
GP 3.00° TCH 40					
5 NM 2.5 NM 1.4 1.1					
CATEGORY	A	B	C	D	
LPV DA	1317-1	250 (300-1)	NA		
LNAV/VNAV DA	1420-1	353 (400-1)	NA		
LNAV MDA	1420-1	353 (400-1)	NA		
CIRCLING	1500-1 432 (500-1)	1520-1 452 (500-1)	NA		