


WAAS CH 50542 W06A	APP CRS 055°	Rwy Ldg TDZE Apt Elev	4494 45 45
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 6

WAINWRIGHT (AWI) (PAWI)

RNP APCH - GPS.	MISSED APPROACH: Climb to 4000 direct MEXIW and hold, continue climb-in-hold to 4000.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.	

ASOS-3 132.25	ANCHORAGE CENTER 135.3 239.25	BARROW RADIO 122.5	CTAF 122.8 0
-------------------------	---	------------------------------	------------------------

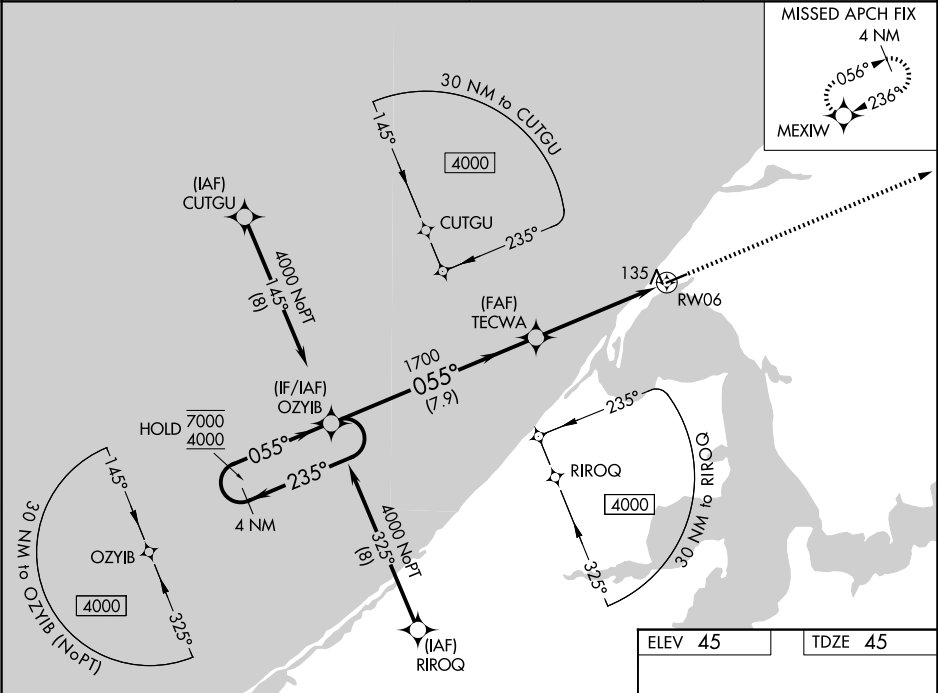

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 31).		4000	MEXIW
7000 4000		OZYIB		TECWA	
GP 3.00° TCH 45		1700		1700	1 NM to RW06
		7.9 NM		4 NM	1 NM
CATEGORY	A	B	C	D	
LPV DA		295-1	250 (300-1)		
LNAV/VNAV DA		316-1	271 (300-1)		
LNAV MDA		400-1	355 (400-1)		
CIRCLING	460-1 415 (500-1)	500-1 455 (500-1)	500-1½ 455 (500-1½)	600-2 555 (600-2)	

