

APP CRS
204°

Rwy Ldg
TDZE
61

Apt Elev
61

RNAV (GPS) RWY 20

CHEVAK (VAK)(PAVA)

RNP APCH - GPS.


▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Baro-VNAV and VDP NA when using HPB/PAHP altimeter setting. When local altimeter setting not received, use HPB/PAHP altimeter setting and increase LNAV/VNAV DA to 352 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D ½ SM and Circling visibility Cat D ½ SM.

MISSED APPROACH: Climb to 500, then climbing left turn to 3000 direct PEYKI and hold.

AWOS-3P 120.625	ANCHORAGE CENTER 124.5	UNICOM 122.8 0	CTAF 123.0 0
---------------------------	----------------------------------	--------------------------	------------------------

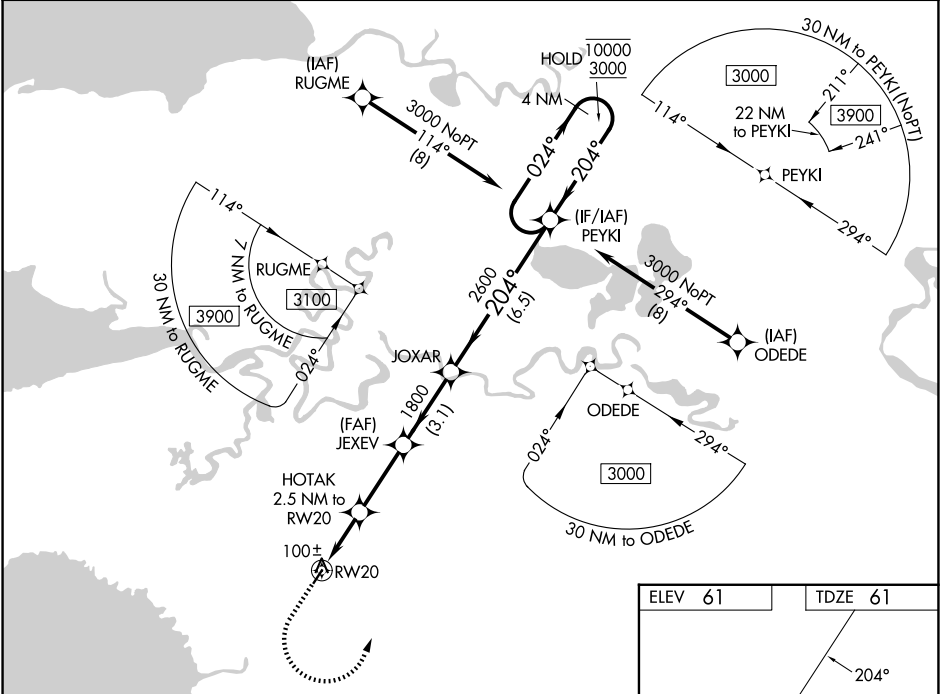

500 3000 PEYKI

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).

↑

↶

✧

HOTAK 2.5 NM to RW20

JEXEV 1800

JOXAR

PEYKI 4 NM Holding Pattern

10000 3000

GP 3.00° TCH 40

1.1 NM 1.4 NM 2.9 NM 3.1 NM 6.5 NM

880 1800

204° 2600

CATEGORY	A	B	C	D
LNAV/VNAV DA	311-1 250 (300-1)			
LNAV MDA	420-1 359 (400-1)			
CIRCLING	520-1 459 (500-1)		520-1½ 459 (500-1½)	700-2 639 (700-2)

ELEV 61 TDZE 61

204°

0.48 UP 3220 K 75

MIRL Rwy 2-20 0

REIL Rws 2 and 20 0