| WAAS CH 97737 W07A | APP CRS 068° | Rwy Ldg 3900<br>TDZE 966<br>Apt Elev 966 |
|---|---|---|

# RNAV (GPS) RWY 7
## BLOYER FLD (Y72)

RNP APCH - GPS.

T Obtain local altimeter setting on CTAF, when not received, use CMY altimeter setting and increase all MDAs 20 feet, increase LNAV visibility Cat C 1/8 SM.

NA Rwy 7 helicopter visibility reduction below 1 SM NA. Procedure NA at night.

MISSED APPROACH: Climb to 3000 direct GLAKE and hold.

| VOLK APP CON ★ | VOLK CTAF | CTAF |
|---|---|---|
| 135.25 244.875 | 127.5 | 122.9 L |

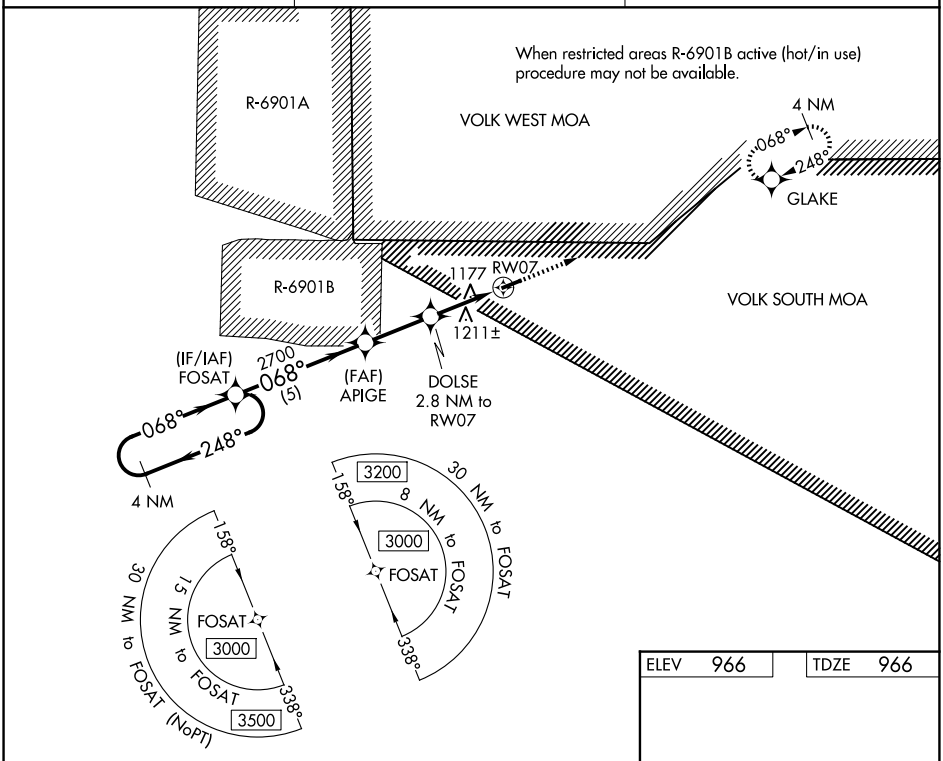


| ELEV 966 | TDZE 966 |
|---|---|

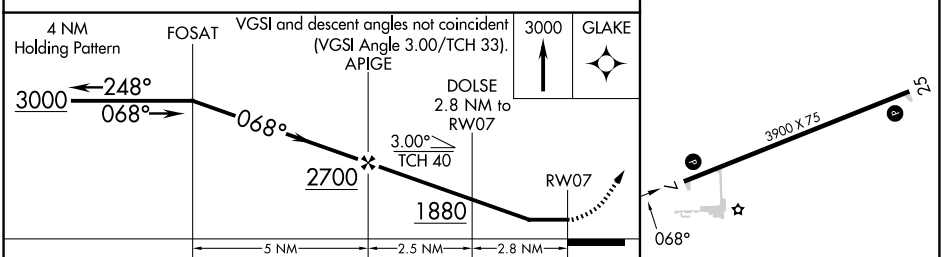


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LP MDA | 1460-1 494 (500-1) | | 1460-1⅜ 494 (500-1⅜) | NA |
| LNAV MDA | 1500-1 534 (600-1) | | 1500-1½ 534 (600-1½) | NA |
| CIRCLING | 1540-1 574 (600-1) | 1560-1 594 (600-1) | 1660-2 694 (700-2) | NA |

MIRL Rwy 7-25 L
REIL Rwys 7 and 25 L

EC-3, 06 AUG 2026 to 03 SEP 2026

EC-3, 06 AUG 2026 to 03 SEP 2026